

SEALED FYR2 R G B W

DESCRIPTION:

SEA LED® is Cantalupi Lighting LED underwater lights series. SEA LED® FYR2 boat LED light brings millions of colors into your life. Every color can be selected to best suit your personal taste or to maximize the effect in the water in every condition. Colors can be controlled via any devices with a color palette through a third party interface. The most advanced LEDs can combine up to 16 million shades of colors for a wonderful effect in the water. SEA LED® FYR2 submersible marine light includes IP67 rated driver at 24 V DC and 2 meters power cable with IP68 Souriau Plug & Play connectors. Passivation treatment for the front trim ring mounted below the water line.

S. STEEL ORDER CODE: 90SEALEFYR2SSPL (MODBUS)
 S. STEEL ORDER CODE: 90SEALEFYRD2SSPL (DMX)
 ALUMINUM ORDER CODE: 90SEALEFYR2AANPL (MODBUS)
 ALUMINUM ORDER CODE: 90SEALEFYRD2AANPL (DMX)


LIGHT TECHNICAL DATA:

Power: 95 W
 Power Supply: 24 V DC
 Current / Amp draw: 4 A @ 24 V DC
 LED Colour: RGB+W
 Beam angle: 58°
 Optional Power Supply: 110 - 220 V AC
 Also available in Aluminum

Note: data referred to the working lamp out of water, and all channels switched on.

CHARACTERISTICS:

Width dimensions: Ø 160 mm / 6.3 in
 Height dimensions: 151 mm / 5.94 in
 Recessed hole: 110 mm / 4.33 in
 S.S. Weight: 6,9 Kg / 15.18 Lbs
 AL. Weight: 3,8 Kg / 8.36 Lbs
 Body material: AISI 316L S. Steel / Aluminum 6082
 Frame material: AISI 316L S. Steel / Aluminum 6082
 Heatsink: Aluminum 6082
 Protective glass: Tempered Clear Glass

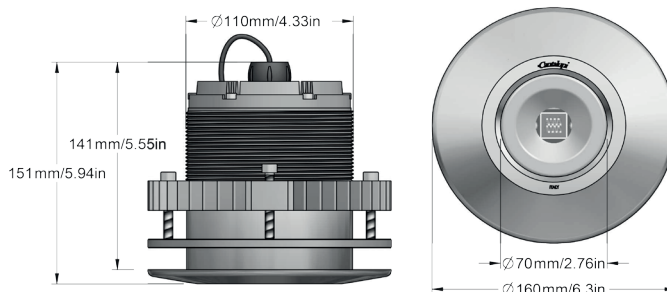

LIGHT POSITIONING:

In order to create the best lighting effect around the yacht, we will provide advice about quantity, depth of fixture and spacing between each SEA LED®. The effect in the water can vary from straight spears of light to a nice and relaxing halo around the hull simply positioning the lights at the desired distance one from the other. As a general rule we recommend placing the lights at a maximum distance of 4mt one from the other.

