

HOUSING SPRING MOUNT

EXTERIOR
DOWNLIGHT



450lm MAX LUMINOUS FLUX

6W TOTAL POWER

CEILING·RECESSED

STEEL 9R HSP - AG

Adjustable round lighting fixture with aluminium anti-glare and beam angle options for different light distributions. STEEL 9 Series offers STEEL 6 lighting performances with the advantage of a gyroscopic core, in a watertight assembly.

Materials: AISI 316L stainless steel body, hard anodised aluminium heat sink, anti-glare and honeycomb and PMMA lens. Housing options are stainless steel, aluminium and plastic.

Finishes: frame comes in standard plus custom colours on request.


Applications: suitable for general lighting of outdoor areas and side decks, with lighting effect depending on selected beam angle, position and tilt angle.



WITH ANTI-GLARE

DRAWING

CEILING MOUNT

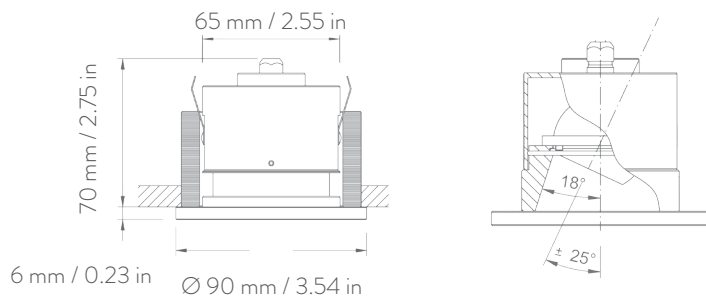

PHOTOMETRIC DIAGRAMS

LENS: NARROW
BEAM: 12°

Lumen: 341
Watt: 6
Lm/W: 57
CCT: 3000K
CRI: 92 TYP

Cone Diagram		
Lux	h/m	Ø/m
4359	1	0.22
1090	2	0.43
484	3	0.65

LENS: MEDIUM
BEAM: 25°

Lumen: 419
Watt: 6
Lm/W: 70
CCT: 3000K
CRI: 92 TYP

Cone Diagram		
Lux	h/m	Ø/m
1794	1	0.45
449	2	0.89
199	3	1.34

LED TYPE: CREE®

LENS: WIDE
BEAM: 36°

Lumen: 373
Watt: 6
Lm/W: 62
CCT: 3000K
CRI: 92 TYP

Cone Diagram		
Lux	h/m	Ø/m
834	1	0.66
208	2	1.32
93	3	1.97

Note : according to the choice of accessories (sanded glass), please consider the implications on the lumen output and the luminous distribution.

BODY FINISHES W/ANTI-GLARE

STAINLESS STEEL

LACQUERED
RAL9010 GLOSS

SANDED
GLASS

STAINLESS STEEL
WELD HOUSING

ALUMINIUM
WELD HOUSING

PLASTIC
GLUED HOUSING



ITEMS	LENSES	COLOUR TEMP.	POWER SUPPLY	BODY FINISHES	ACCESSORIES
CODE	NARROW MEDIUM WIDE	2700K 3000K 4000K	CLL Vdc 24-32 DRIVER INCLUDED	CSL Vf11.3 If 500 mA DRIVER NOT INCLUDED	STAINLESS STEEL
				LACQUERED RAL9010 GLOSS	SANDED GLASS
				S·STEEL HOUSING	ALUMINIUM HOUSING
				PLASTIC HOUSING	
20SRHS9	NB - MB - WB	2 - 3 - 4	D - N	SB - LB	SG
					MODEL ON REQUEST
					MODEL ON REQUEST
					MODEL ON REQUEST



RECESSED
CEILING MOUNT



SOLIDS & LIQUIDS
PROTECTION RATING



FIRE
PROTECTION



ELECTRICAL SHOCK
CLASS PROTECTION



EUROPEAN
CONFORMITY



ALSO SUITABLE
FOR RESIDENTIAL

Note : Depending on the choice of finish, thickness of the product can vary up to 0,2 mm. Information provided with this document may be subject to change at any time without notice.

RELEASED ON 21.07.2017