
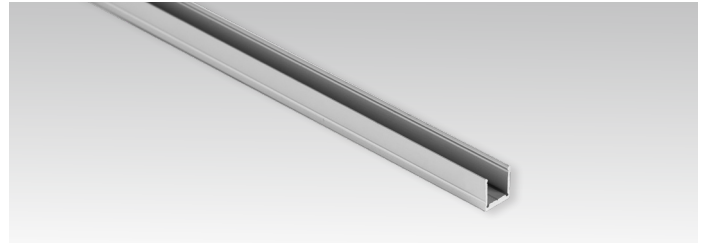


# SNAKE TOP MINI WHITE

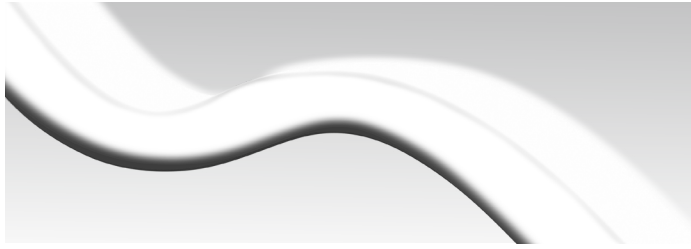


## Snake product information

IP68 flexible STRIP LED light line fully encapsulated in polyurethane compound. Resistant to water, UV radiation, abrasion and chemicals. Very bright and homogeneous illumination over the entire light emitting surface also in curve form. Clear curved or linear lines and light-emitting surface enables a flush installation in ceilings, walls and furniture. The SNAKE are provided with 40 cm of cable without connectors from both sides; the cable feed enables a shadow-free alignment.

## Technical data

Watt/Meter	10	Voltage	24VDC
Led/Meter	140	IP	68
Lumen/Meter @3000K	680	Cut	50 mm
CCT	2700K 3000K 4000K 6000K	Ambient temp.	-30°C ~ +50°
<i>Color correlated temperature</i>			
CRI	> 80		
<i>Color rendering index</i>			

## Standard lengths

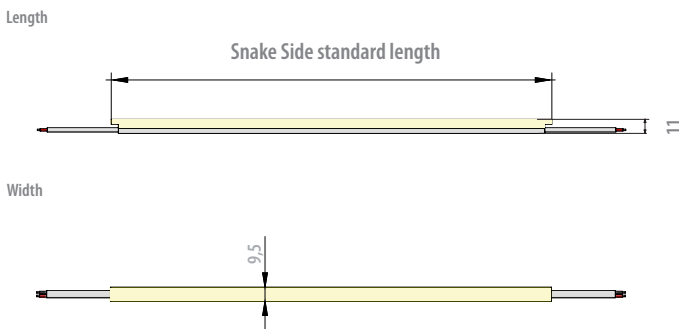

## Codes

Snake Top M standard length (1030 mm)	83 SNAKETOP M 1030 + CCT*
Snake Top M standard length (2030 mm)	83 SNAKETOP M 2030 + CCT*
Snake Top M standard length (3030 mm)	83 SNAKETOP M 3030 + CCT*
Snake Top M standard length (4030 mm)	83 SNAKETOP M 4030 + CCT*
Snake Top M standard length (5030 mm)	83 SNAKETOP M 5030 + CCT*

*\*only the first three numbers (270, 300, 400, 600)*


## Aluminium mounting accessory product information

Profile material: Anodised aluminium


Single extrusion profile various possible installations.

Standard length: 2m

## Technical data

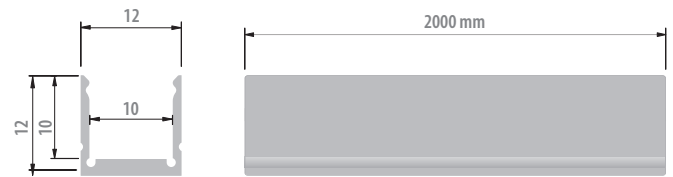

## Standard and cutting lengths

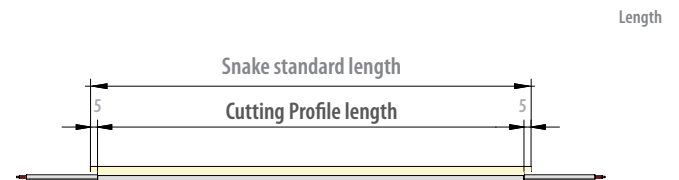

Snake standard length	Cutting Profile lengths
1030 mm	984 mm
2030 mm	1984 mm
3030 mm	2984 mm
4030 mm	3984 mm
5030 mm	4984 mm

## Codes

Profiles Top M standard length (2000 mm)	85 SNAKE TOP M 2000AAN
--	------------------------



EUROPEAN  
COMFORMITY



RESTRICTION OF HAZARDOUS  
SUBSTANCES DIRECTIVE




DIMMABLE

**Any cutting process made by anyone outside of Cantalupi srl voids the product's warranty.**

Information provided with this document may be subject to change at any time without notice.


## WARNING: how to bend

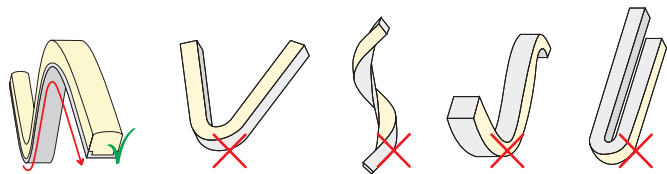

✓ Correct



✗ Do not bend this way.  
the LED strip will break immediately

## Max bending Radius

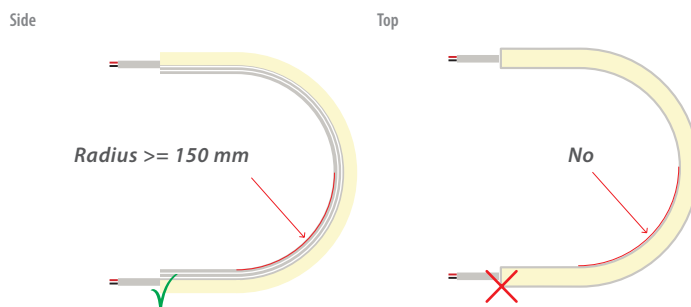


## Mounting system

Radius      Cut      Cutting blade dimensions




Radius	Cut	Cutting blade dimensions
600 mm	25 mm	1,5 mm
500 mm	25 mm	2,5 mm
400 mm	25 mm	3,5 mm
300 mm	25 mm	4,5 mm

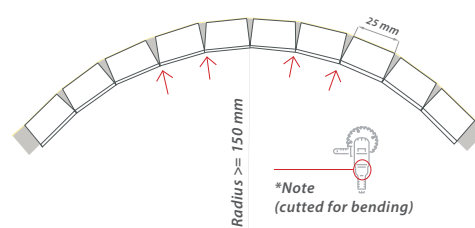

During installation, please lubricate the aluminium profile with a non silicone-based detaching agent.


## Mounting Bracket

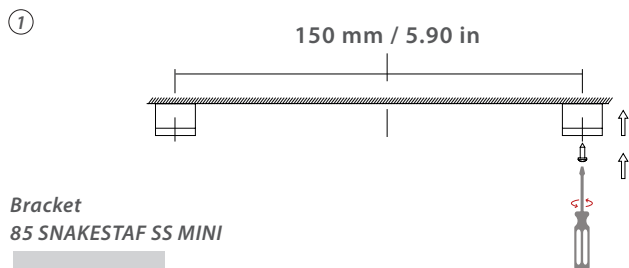

Bracket  
85 SNAKESTAF SS MINI



Descriptons:  
SNAKE bracket set, stainless steel

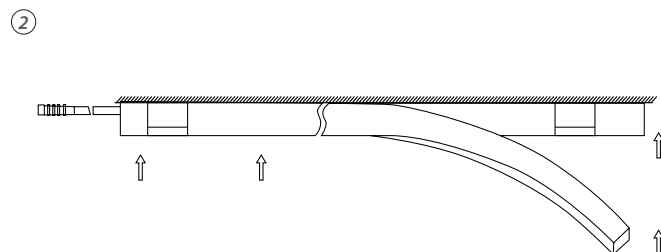

## Wiring diagram

