


# PIXEL 60 RGB

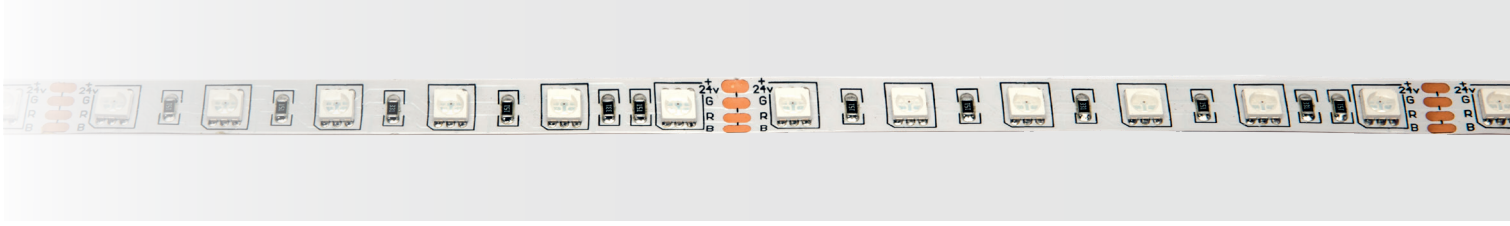

## Product information


RGB flexible mid-power LED strip with white reflective surface and 3M high quality adhesive on the back. The LED strip can be used in any indoor environment to highlight architectural details or integrated into furnitures to add values to any space with the colors. An aluminum profile must be used to act as a heatsink. A RGB Controller is needed in order to manage the color variations.

Watt/Meter	13.2	Voltage	24VDC
Led/Meter	60	SMD LED	5050
Colors	● RED ● GREEN ● BLUE	IP	20
Life time	> 30.000 h	Cut	100 mm
Ambient temp.	-20°C / +45°C	Width	8 mm

## Dimensions

## Code

LED Strip RGB 83PIXEL 6024 WP 5050 RGB

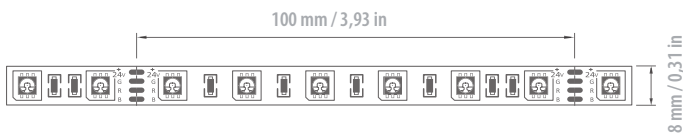

## Reel Packaging



**Description:**  
all the strip led will be delivered in 5m. reel packaging.

## Suggested Profiles

Code	PDSA	8545AL	85STE02	85STE06	85STE09	851UNICA	85MICA	85STE01	85STE03	85STE08	85STE10	851UNICAXL
Profiles												
Heat dissipation and/or LED strip width	✓	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓

Information provided with this document may be subject to change at any time without notice.



EUROPEAN CONFORMITY



RESTRICTION OF HAZARDOUS SUBSTANCES DIRECTIVE



DIMMABLE

RELEASED ON 03.07.2018