


PIXEL 120 WHITE 5mm

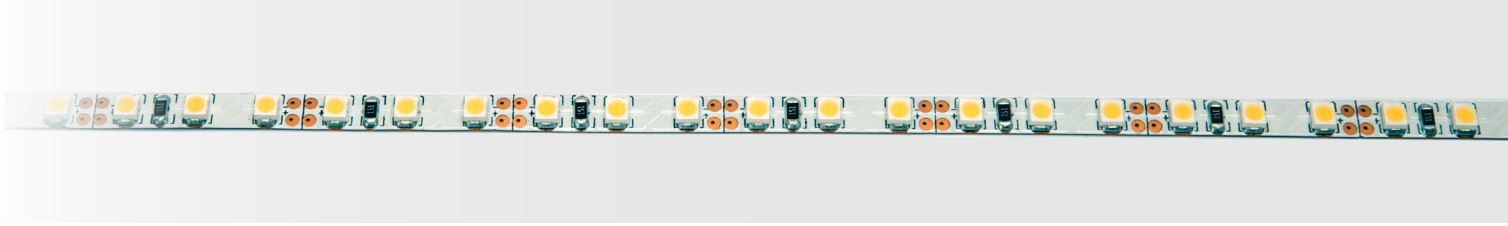


Product information

Flexible mid-power LED strip, with a reduced width, with white reflective surface and 3M high quality adhesive on the back. The LED strip can be used in any indoor environment to highlight small details or integrated into furnitures to add values to any space. It is advisable to install this Strip LED into a aluminium profile as heatsink. Perfect to use with STE09 and STE02 Aluminium Profiles.

Watt/Meter	9.6	Voltage	24VDC
Led/Meter	120	SMD LED	3528
Lumen/Meter @3000K	600	IP	20
CCT	2700K 3000K 4000K	Cut	50 mm
CRI	> 80	Width	5 mm
Life time	> 30.000 h	Ambient temp.	-20°C / +45°C

Dimensions

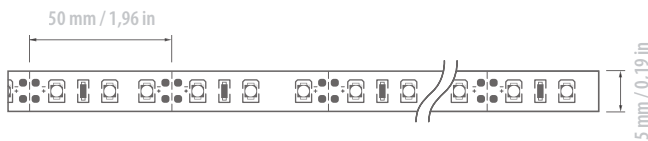


Codes

LED Strip 2700K (5m)	83PIXEL 120524 WP 2700
LED Strip 3000K (5m)	83PIXEL 120524 WP 3000
LED Strip 4000K (5m)	83PIXEL 120524 WP 4000

Accessories

Connector With Wire

Code: 313CONNEW8



Description:

Connector with wire for 8 mm white led strip.

Connector Without Cable


Code: 313CONN8B



Description:

Connector without wire for 8 mm with single color led strip.

Reel Packaging



Description:

All the strip led will be delivered in 5m reel packaging.

Suggested Profiles

Code	PDSA	8545AL	85STE02	85STE06	85STE09	851UNICA	85MICA	85STE01	85STE03	85STE08	85STE10	851UNICAXL
Profiles												
Heat dissipation and/or LED strip width	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Dots free with opal diffuser @ max lighting flux	✓	✓	✗	✓	✓	✓	✗	✓	✗	✓	✗	✓

Information provided with this document may be subject to change at any time without notice.



EUROPEAN CONFORMITY



RESTRICTION OF HAZARDOUS SUBSTANCES DIRECTIVE



DIMMABLE

RELEASED ON 03.07.2018