


PIXEL 128 WHITE

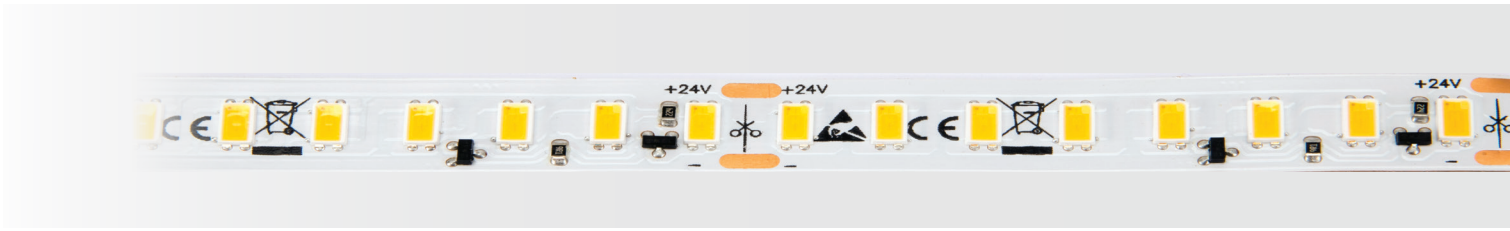


Product information

White flexible high-power LED strip with reflective surface and 3M high quality adhesive on the back. The LED strip can be used in any indoor environment to highlight architectural details or integrated into furnitures to add values to any space. An aluminium profile must be used to act as a heatsink.

Watt/Meter	22	Voltage	24VDC
Led/Meter	128	SMD LED	5630
Lumen/Meter @3000K	2500	IP	20
CCT	2700K 3000K 4000K	Cut	62 mm
CRI	> 80	Width	12 mm
Life time	> 30.000 h	Ambient temp.	-20°C / +45°C

Dimensions

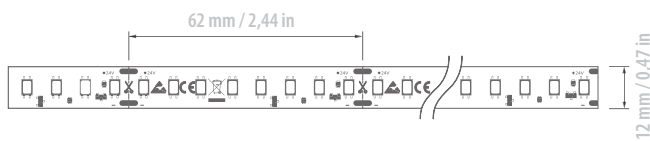

Code

LED Strip 2700K (5m)	83PIXEL 12824 IP2 2700
LED Strip 3000K (5m)	83PIXEL 12824 IP2 3000
LED Strip 4000K (5m)	83PIXEL 12824 IP2 4000

Accessories

Connector With Wire

313CONNEW12



Description:

Connector with wire for 12mm white led strip.

Connector Without Cable


313CONNE12



Description:

Connector without wire for 12mm with single color led strip.

Reel Packaging



Description:

all the strip led will be delivered in 5mt. reel packaging.

Suggested Profiles

Code	PDSA	8545AL	85STE02	85STE06	85STE09	851UNICA	85MICA	85STE01	85STE03	85STE08	85STE10	851UNICAXL
Profiles												
Heat dissipation and/or LED strip width	×	×	×	✓	×	×	×	✓	×	×	×	×
Dots free with opal diffuser @ max lighting flux				✓				✓				



EUROPEAN CONFORMITY



RESTRICTION OF HAZARDOUS SUBSTANCES DIRECTIVE



DIMMABLE

Information provided with this document may be subject to change at any time without notice.

RELEASED ON 03.07.2018