


PIXEL 60 WHITE

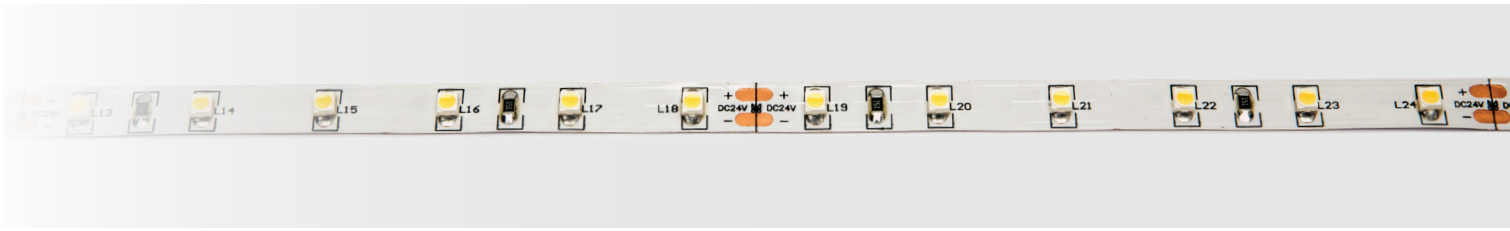


Product information

White flexible low-power LED strip with reflective surface and 3M high quality adhesive on the back. The LED strip can be used in any indoor environment to highlight architectural details or integrated into furnitures to add values to any space. This LED Strip does not need a heatsink. The high distance between the LEDs could cause the view of the dots even when using deep aluminum profiles.

Watt/Meter	4.8	Voltage	24VDC
Led/Meter	60	SMD LED	3528
Lumen/Meter @3000K	330	IP	33
CCT	2700K 3000K 4000K	Cut	100 mm
CRI	> 80	Width	8 mm
Life time	> 30.000 h	Ambient temp.	-20°C / +45°C

Dimensions

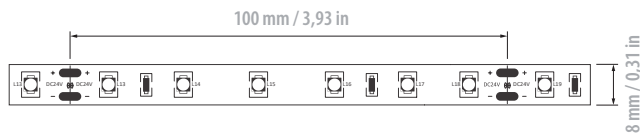

Codes

LED Strip 2700K (5m)	83PIXEL 6024 WP 2700
LED Strip 3000K (5m)	83PIXEL 6024 WP 3000
LED Strip 4000K (5m)	83PIXEL 6024 WP 4000

Accessories

Connector With Wire

Code: 313CONNEW8



Description:

Connector with wire for 8 mm white led strip.

Connector Without Cable


Code: 313CONN8



Description:

Connector without wire for 8 mm with single color led strip.

Reel Packaging



Description:

all the strip led will be delivered in 5m reel packaging.

Suggested Profiles

Code	PDSA	8545AL	85STE02	85STE06	85STE09	851UNICA	85MICA	85STE01	85STE03	85STE08	85STE10	851UNICAXL
Profiles												
Heat dissipation and/or LED strip width	✓	✓	✗	✓	✗	✓	✓	✓	✓	✓	✓	✓
Dots free with opal diffuser @ max lighting flux	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗



EUROPEAN CONFORMITY



RESTRICTION OF HAZARDOUS SUBSTANCES DIRECTIVE



DIMMABLE

Information provided with this document may be subject to change at any time without notice.

RELEASED ON 03.07.2018