


## SNAKE TOP MINI RGB

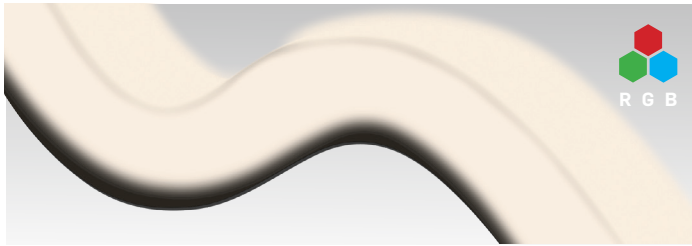


### Snake product information

IP68 flexible STRIP LED light line fully encapsulated in polyurethane compound. Resistant to water, UV radiation, abrasion and chemicals. Very bright and homogeneous illumination over the entire light emitting surface also in curve form. Clear curved or linear lines and light-emitting surface enables a flush installation in ceilings, walls and furniture. The STRIP LED are provided with 40 cm of cable without connectors from both sides; the cable feed enables a shadow-free alignment.

### Technical data


Watt/Meter	10	Voltage	24VDC
Led/Meter	140	IP	68
Lumen/Meter	---	Cut	83,33 mm
CCT <i>Color correlated temperature</i>	● R ● G ● B	Ambient temp.	-30°C ~ +50°
CRI <i>Color rendering index</i>	> 80		

### Standard lengths

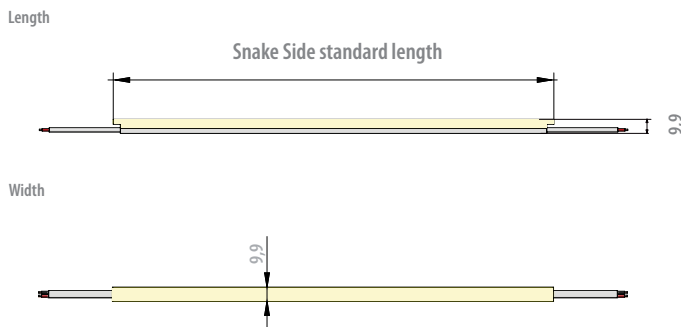

### Codes

Snake Top M standard length (1030 mm)	83SNAKE TOP M RGB 1030
Snake Top M standard length (2030 mm)	83SNAKE TOP M RGB 2030
Snake Top M standard length (3030 mm)	83SNAKE TOP M RGB 3030
Snake Top M standard length (4030 mm)	83SNAKE TOP M RGB 4030
Snake Top M standard length (5030 mm)	83SNAKE TOP M RGB 5030

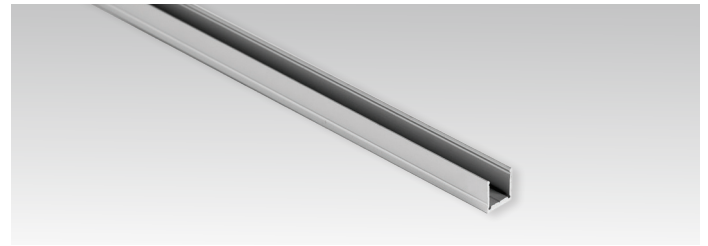


### Aluminium mounting accessory product information

Profile material: Anodised aluminium


Single extrusion profile various possible installations.

Standard length: 2m

### Technical data

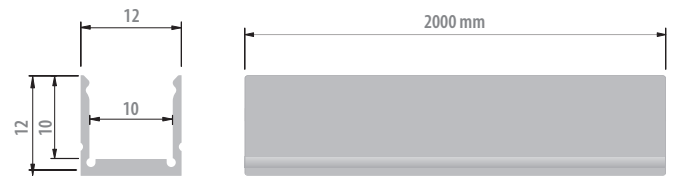

### Standard and cutting lengths

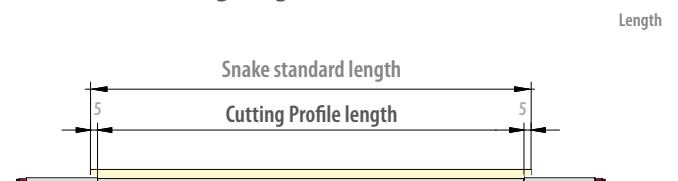

### Snake standard length

1030 mm  
2030 mm  
3030 mm  
4030 mm  
5030 mm

### Cutting Profile lengths

984 mm  
1984 mm  
2984 mm  
3984 mm  
4984 mm

### Codes

Profiles Top M standard length (2000 mm)

85SNAKE TOP M 2000 AAN



EUROPEAN  
COMFORMITY




RESTRICTION OF HAZARDOUS  
SUBSTANCES DIRECTIVE



DIMMABLE

*Note* : Information provided with this document may be subject to change at any time without notice.


## WARNING: how to bend

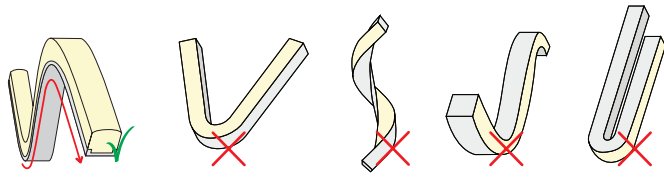

✓ Correct


✗ Do not bend this way.  
the LED strip will break immediately

## Max bending Radius

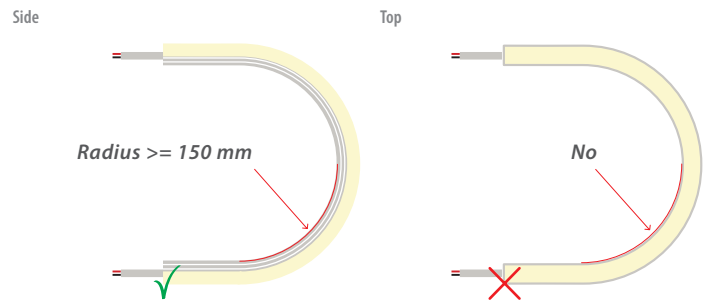


## Mounting system

Radius	Cut	Cutting blade dimensions
600 mm	25 mm	1,5 mm
500 mm	25 mm	2,5 mm
400 mm	25 mm	3,5 mm
300 mm	25 mm	4,5 mm

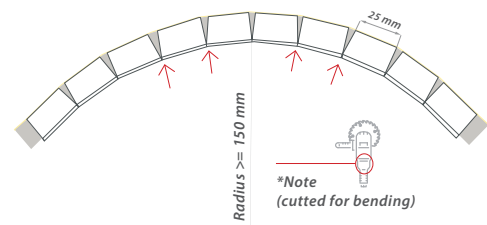

During installation, please lubricate the aluminium profile with a non silicone-based detaching agent.


## Mounting Bracket

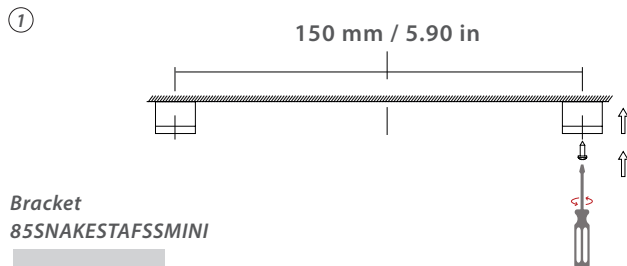

Bracket  
85SNAKESTAFSSMINI



Descriptons:  
SNAKE bracket set, stainless steel

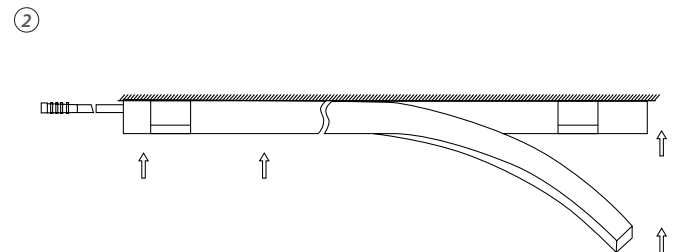

## Wiring diagram

