


SNAKE TOP RGBW

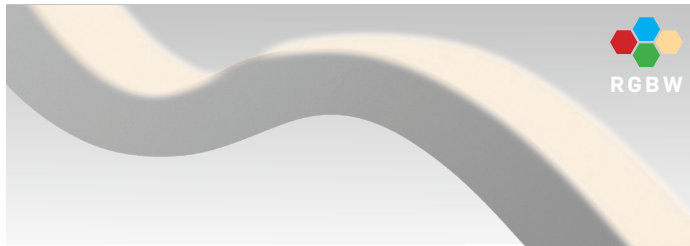


Snake product information

IP68 flexible STRIP LED light line fully encapsulated in polyurethane compound. Resistant to water, UV radiation, abrasion and chemicals. Very bright and homogeneous illumination over the entire light emitting surface also in curve form. Clear curved or linear lines and light-emitting surface enables a flush installation in ceilings, walls and furniture. The SNAKE are provided with 40 cm of cable without connectors from both sides; the cable feed enables a shadow-free alignment.

Technical data

Watt/Meter	10	Voltage	24VDC
Led/Meter	70	IP	68
Lumen/Meter @3000K	----	Cut	100 mm
CCT ● ● ● ● ● W (CCT) 2700K 3000K		Ambient temp.	-30°C ~ +50°
Color correlated temperature			
CRI	----		
Color rendering index			


Standard lengths

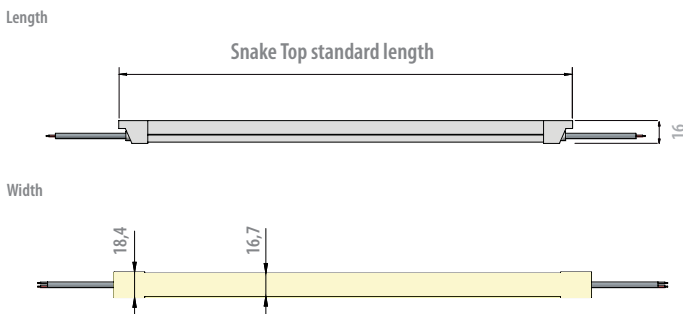

Codes

Snake Top standard length (1030 mm)	83 SNAKETOP 103RGB + CCT*
Snake Top standard length (2030 mm)	83 SNAKETOP 203RGB + CCT*
Snake Top standard length (3030 mm)	83 SNAKETOP 303RGB + CCT*
Snake Top standard length (4030 mm)	83 SNAKETOP 403RGB + CCT*
Snake Top standard length (5030 mm)	83 SNAKETOP 503RGB + CCT*

*(2700, 3000)

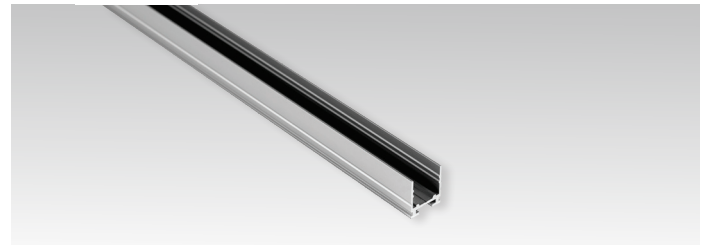


Aluminium mounting accessory product information

Profile material: Anodised aluminium


Single extrusion profile various possible installations.

Standard length: 2m

Technical data

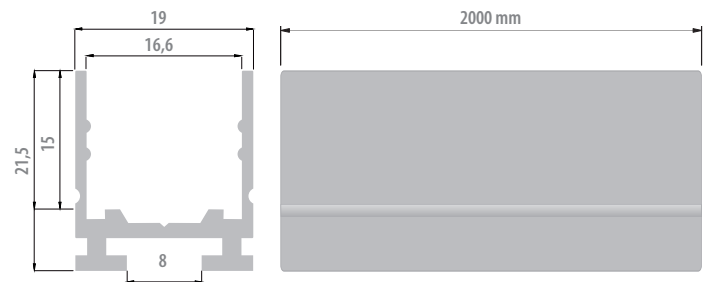

Standard and cutting lengths

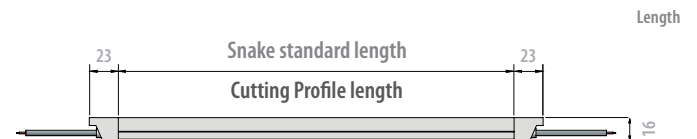

Snake standard length

- 1030 mm
- 2030 mm
- 3030 mm
- 4030 mm
- 5030 mm

Cutting Profile lengths

- 984 mm
- 1984 mm
- 2984 mm
- 3984 mm
- 4984 mm

Codes

Profiles Top standard length (2000 mm)

85 SNAKETOP 2000AA



EUROPEAN CONFORMITY



RESTRICTION OF HAZARDOUS SUBSTANCES DIRECTIVE




DIMMABLE

Any cutting process made by anyone outside of Cantalupi srl voids the product's warranty.

Information provided with this document may be subject to change at any time without notice.


WARNING: how to bend

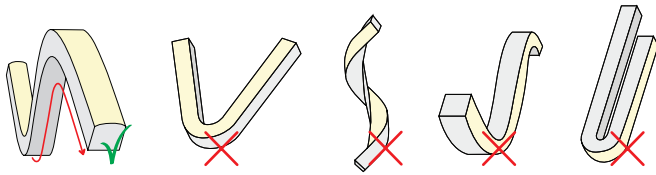

✓ Correct



✗ Do not bend this way.
the LED strip will break immediately

Max bending Radius

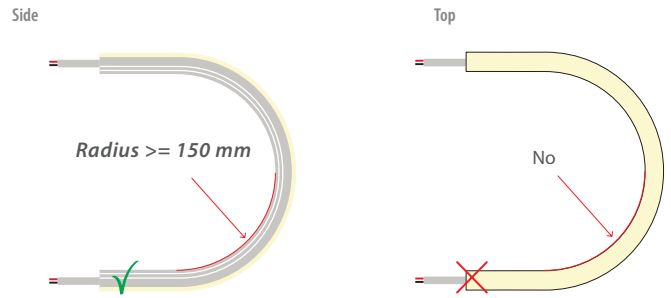

Mounting system


Radius Cut Cutting blade dimensions



600 mm
500 mm
400 mm
300 mm


25 mm
25 mm
25 mm
25 mm

1,5 mm
2,5 mm
3,5 mm
4,5 mm

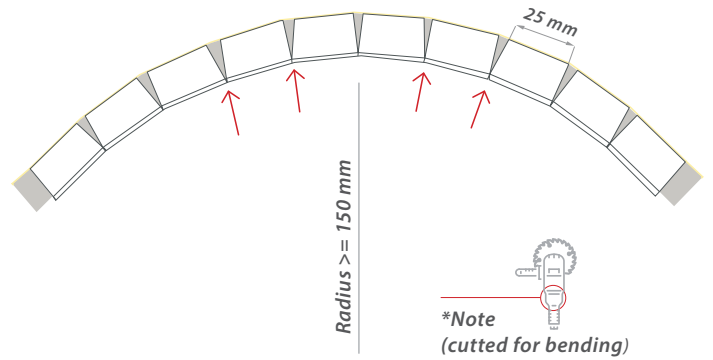

Mounting Bracket

①

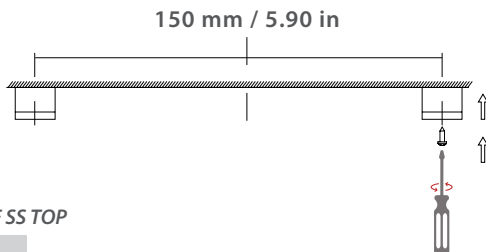


Bracket
85 SNAKESTAF SS TOP




Descriptions:
SNAKE bracket set, stainless steel

②

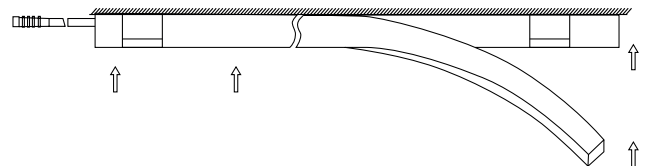

Wiring diagram

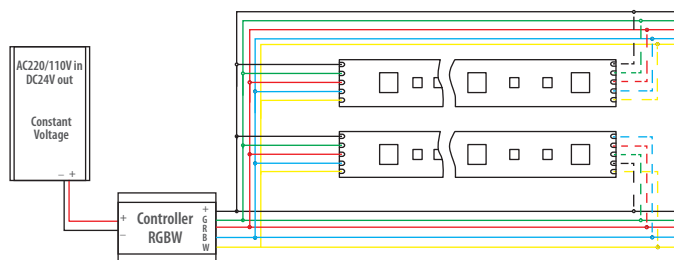

EUROPEAN
COMFORMITY



RESTRICTION OF HAZARDOUS
SUBSTANCES DIRECTIVE



DIMMABLE

Any cutting process made by anyone outside of Cantalupi srl voids the product's warranty.

Information provided with this document may be subject to change at any time without notice.

RELEASED ON 03.07.2018