

OTTO LIFTER M

Telescopic OTTO lamp with automatic movement through an electrical actuator. It can be switch on and off at the start of the telescopic control (up and down). Operated by: remote control, manual control, yacht automation. Enclosure incorporates a valve to drain humidity and avoid condensation.

Dimensions:

Ø 150 mm / 5.90 in (diameter)
 200 mm / 7.87 in (height)
 403 mm / 15.06 in (depth)
 603 mm / 23.74 in (total height)

Materials:

Body: AISI 316L Stainless Steel
 Frame: AISI 316L Stainless Steel
 Protective glass: Borosilicate glass

Note : Standard power cable: L = 2 mt

Note : Control box not included.




DRAWING

INSTALLATION LOCATION

CLOSED PRODUCT

OPEN PRODUCT

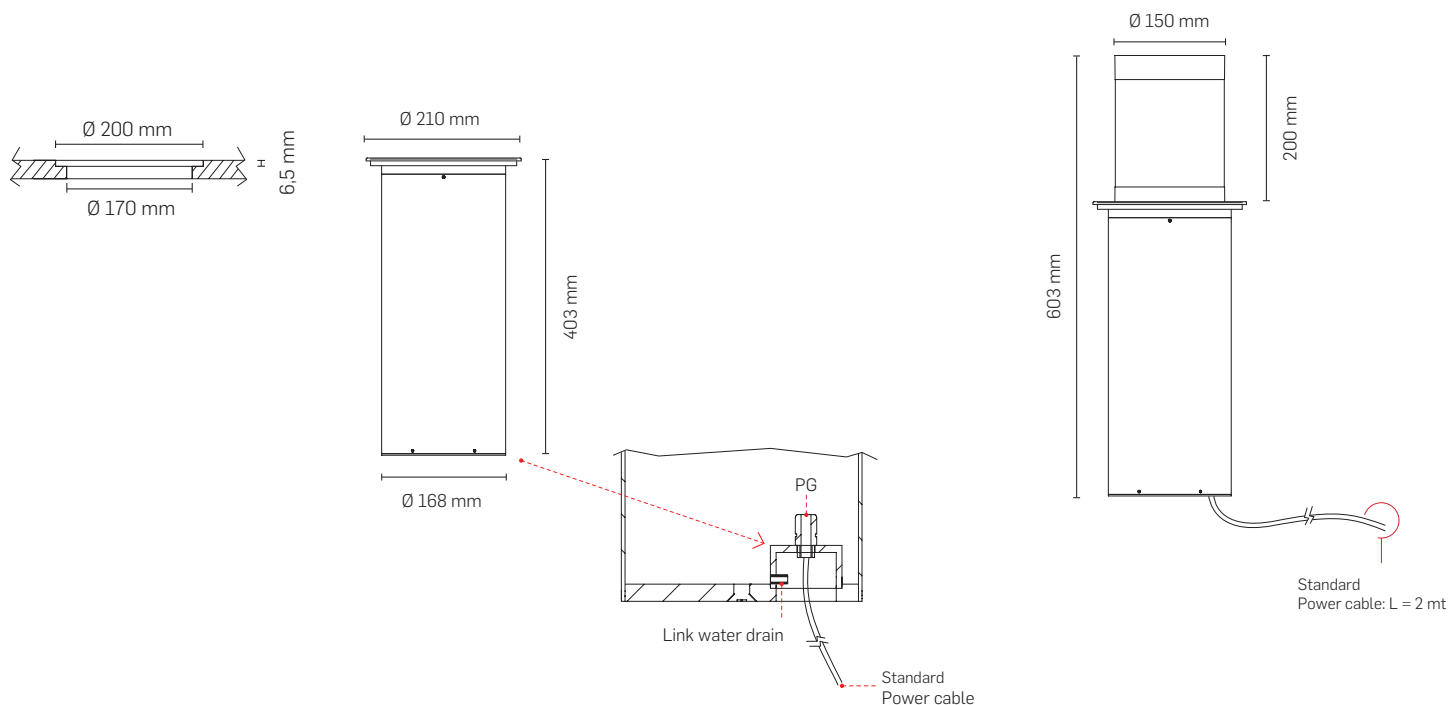

ITEMS	LED POWER SUPPLY	COLOR TEMP.	BODY FINISHES	VERSION
CODE	CLL Vdc 24-32 DRIVER INCLUDED	2700K 3000K	STAINLESS STEEL	CODE
45OTTOLIFT02	D	2 - 3	SS	NEW



Note : Information provided with this document may be subject to change at any time without notice.