


# PIXEL 120 DYN HighFlux

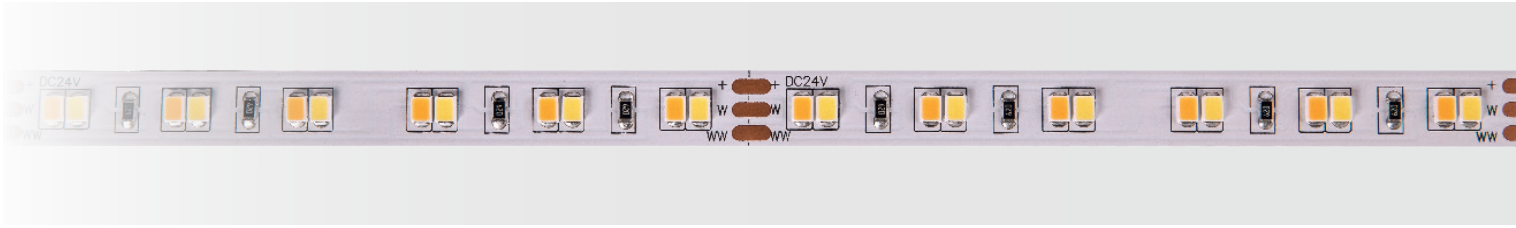


## Product information

Dynamic White flexible High-power LED strip with a high lumen output, white reflective surface and 3M high quality adhesive on the back. The LED strip can be used in any indoor environment to highlight architectural details or integrated into furnitures to add values to any space changing the mood of the ambiance using different light color temperatures recreating the natural variations of the light. An aluminum profile must be used to act as a heatsink. A Dynamic White Controller is needed in order to manage the CCT variations.

Watt/Meter	24	Voltage	24VDC
Led/Meter	120	SMD LED	2835
Lumen/Meter @Max	2640	IP	20
CCT Adjustable	2000K 4500K	Cut	100 mm
CRI	> 80	Width	10 mm
Life time	> 30.000 h	Ambient temp.	-20°C / +45°C

## Dimensions

Dimension diagram (unit:mm)

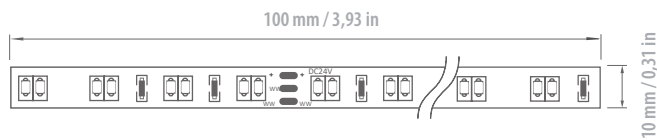

## Code

LED Strip DYNW 83PIXEL 12024 WP 2835 DYN

## Reel Packaging



Description:  
all the strip led will be delivered in 5m. reel packaging.

## Suggested Profiles

Code	PDSA	8545AL	85STE02	85STE06	85STE09	851UNICA	85MICA	85STE01	85STE03	85STE08	85STE10	851UNICAXL
Profiles												
Heat dissipation and/or LED strip width	✓	✓	✗	✓	✗	✗	✗	✓	✗	✓	✓	✗