


PIXEL 120 DYN

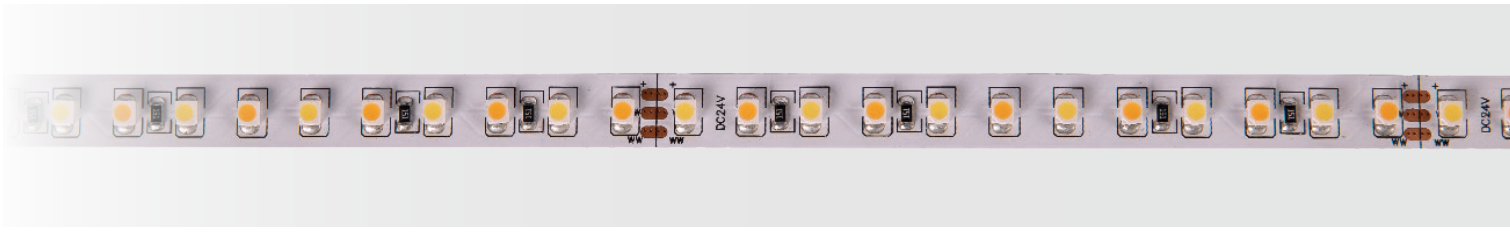

Product information

Dynamic White flexible High-power LED strip with white reflective surface and 3M high quality adhesive on the back. The LED strip can be used in any indoor environment to highlight architectural details or integrated into furnitures to add values to any space changing the mood of the ambience using different light color temperatures recreating the natural variations of the light. An aluminum profile must be used to act as a heatsink. A Dynamic White Controller is needed in order to manage the CCT variations.


Watt/Meter	9.6	Voltage	24VDC
Led/Meter	120	SMD LED	3528
Lumen/Meter @Max	840	IP	20
CCT Adjustable	2200K 4500K	Cut	100 mm
CRI	> 80	Width	10 mm
Life time	> 30.000 h	Ambient temp.	-20°C / +45°C

Dimensions

Dimension diagram (unit:mm)

Code

LED Strip DYNW 83PIXEL 12024 WP 3528 DYN

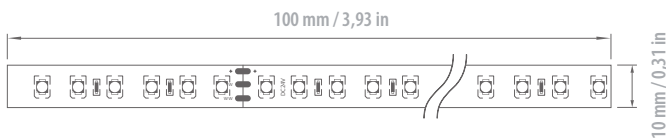

Reel Packaging



Description:
all the strip led will be delivered in 5m. reel packaging.

Suggested Profiles

Code	PDSA	8545AL	85STE02	85STE06	85STE09	851UNICA	85MICA	85STE01	85STE03	85STE08	85STE10	851UNICAXL
Profiles												
Heat dissipation and/or LED strip width	✓	✓	✗	✓	✗	✗	✗	✓	✗	✓	✓	✗



EUROPEAN CONFORMITY



RESTRICTION OF HAZARDOUS SUBSTANCES DIRECTIVE



DIMMABLE

Information provided with this document may be subject to change at any time without notice.

RELEASED ON 03.07.2018