

for Interiors

PIXEL 120 WHITE 5mm




FLEXIBLE MID-POWER LED STRIP, WITH A REDUCED WIDTH, WITH WHITE REFLECTIVE SURFACE AND 3M HIGH QUALITY ADHESIVE ON THE BACK. THE LED STRIP CAN BE USED IN ANY INDOOR ENVIRONMENT TO HIGHLIGHT SMALL DETAILS OR INTEGRATED INTO FURNITURES TO ADD VALUES TO ANY SPACE. IT IS ADVISABLE TO INSTALL THIS STRIP LED INTO AN ALUMINIUM PROFILE AS HEATSINK. PERFECT TO USE WITH STE09 AND STE02 ALUMINIUM PROFILES.

TECHNICAL DATA

WATT/METER	9.6	VOLTAGE	24Vdc
LED/METER	120	SMD LED	3528
LUMEN/METER @3000K	600	IP	20
CCT	2700K/3000K/4000K	CUT	50mm
CRI	>80	WIDTH	5mm
LIFETIME	>30.000H	AMBIENT TEMP.	-20c ~ +45°c

DIMENSIONS

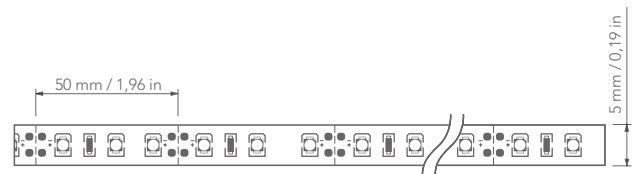

ACCESSORIES

WIRED CONNECTOR FOR 8mm WHITE STRIP LED



CODE: 313CONNEW8

UNWIRED CONNECTOR FOR 8mm WHITE STRIP LED



CODE: 313CONN8

REEL PACKAGING



THE LED STRIP WILL BE DELIVERED IN 5m REEL PACKAGING.

CODES

LED STRIP 2700K (5m)	83PIXEL 120524 WP 2700
LED STRIP 3000K (5m)	83PIXEL 120524 WP 3000
LED STRIP 4000K (5m)	83PIXEL 120524 WP 4000

SUGGESTED PROFILES

Code	PDSA	8545AL	85STE02	85STE06	85STE09	851UNICA	85MICA	85STE01	85STE03	85STE08	85STE10	851UNICAXL
Profiles												
Heat dissipation and/or LED strip width	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Dots free with opal diffuser @ max lighting flux	✓	✓	✗	✓	✓	✓	✗	✓	✗	✓	✗	✓



DIMMABLE LIGHT



TEST REPORT



CE CERTIFIED

ANY CUTTING PROCESS MADE BY ANYONE OUTSIDE OF CANTALUPI SRL VOIDS THE PRODUCT'S WARRANTY
INFORMATIONS PROVIDED WITH THIS DOCUMENT MAY BE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE

RELEASED ON 26.02.2021