

# PIXEL 60 IP 68 WHITE




IP68 FLEXIBLE MID-POWER LED STRIP WITH A SILICONE COATING AND 3M HIGH QUALITY ADHESIVE ON THE BACK. THE LED STRIP CAN BE USED IN ANY INDOOR AND OUTDOOR ENVIRONMENT TO HIGHLIGHT ARCHITECTURAL DETAILS OR INTEGRATED INTO FURNITURES TO ADD VALUES TO ANY SPACE. IT IS ADVISIBLE TO INSTALL THIS STRIP LED ON A METAL SURFACE AS HEATSINK.

## TECHNICAL DATA

WATT/METER	14.4	VOLTAGE	24VDC
LED/METER	60	SMD LED	5050
LUMEN/METER @3000K	1100	IP	68
CCT	2700K/3000K/4000K	CUT	100mm
CRI	>80	AMBIENT TEMP.	-20c ~ +45°c
LIFETIME	>30.000H		


## DIMENSIONS

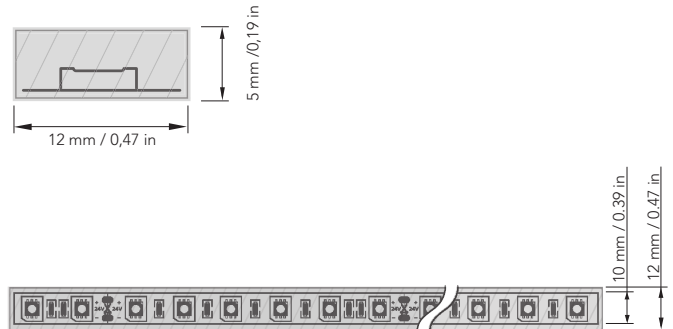

## CODES

LED STRIP 2700K (5m)	<b>83PIXEL 606824 WP 5050 300 270</b>
LED STRIP 3000K (5m)	<b>83PIXEL 606824 WP 5050 300 300</b>
LED STRIP 4000K (5m)	<b>83PIXEL 606824 WP 5050 300 400</b>

## REEL PACKAGING



THE LED STRIP WILL BE DELIVERED IN 5m REEL PACKAGING.



DIMMABLE LIGHT



TEST REPORT



CE CERTIFIED

ANY CUTTING PROCESS MADE BY ANYONE OUTSIDE OF CANTALUPI SRL VOIDS THE PRODUCT'S WARRANTY  
INFORMATIONS PROVIDED WITH THIS DOCUMENT MAY BE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE