

for Interiors

# PIXEL 60 WHITE




WHITE FLEXIBLE LOW-POWER LED STRIP WITH REFLECTIVE SURFACE AND 3M HIGH QUALITY ADHESIVE ON THE BACK. THE LED STRIP CAN BE USED IN ANY INDOOR ENVIRONMENT TO HIGHLIGHT ARCHITECTURAL DETAILS OR INTEGRATED INTO FURNITURES TO ADD VALUES TO ANY SPACE. THIS LED STRIP DOES NOT NEED A HEATSINK. THE HIGH DISTANCE BETWEEN THE LEDS COULD CAUSE THE VIEW OF THE DOTS EVEN WHEN USING DEEP ALUMINUM PROFILES.

## TECHNICAL DATA

|                    |                   |               |              |
|--------------------|-------------------|---------------|--------------|
| WATT/METER         | 4.8               | VOLTAGE       | 24Vdc        |
| LED/METER          | 60                | SMD LED       | 3528         |
| LUMEN/METER @3000K | 330               | IP            | 33           |
| CCT                | 2700K/3000K/4000K | CUT           | 100mm        |
| CRI                | >80               | WIDTH         | 12mm         |
| LIFETIME           | >30.000H          | AMBIENT TEMP. | -20c ~ +45°c |

## DIMENSIONS

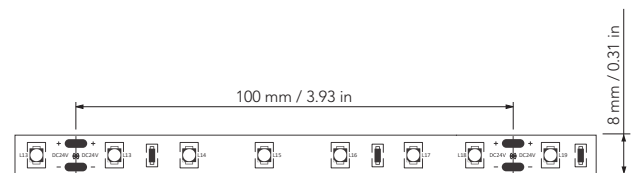

## ACCESSORIES

WIRED CONNECTOR FOR 8mm WHITE STRIP LED



CODE: 313CONNEW8

UNWIRED CONNECTOR FOR 8mm WHITE STRIP LED



CODE: 313CONNEX8

## REEL PACKAGING



THE LED STRIP WILL BE DELIVERED IN 5m REEL PACKAGING.

## CODES

|                      |                      |
|----------------------|----------------------|
| LED STRIP 2700K (5m) | 83PIXEL 6024 WP 2700 |
| LED STRIP 3000K (5m) | 83PIXEL 6024 WP 3000 |
| LED STRIP 4000K (5m) | 83PIXEL 6024 WP 4000 |

## SUGGESTED PROFILES

| Code   | PDSA | 8545AL | 85STE02 | 85STE06 | 85STE09 | 851UNICA | 85MICA | 85STE01 | 85STE03 | 85STE08 | 85STE10 | 851UNICAXL |
|--|------|--------|---------|---------|---------|----------|--------|---------|---------|---------|---------|------------|
| Profiles   |      |        |         |         |         |          |        |         |         |         |         |            |
| Heat dissipation and/or LED strip width          | ✓    | ✓      | ✗       | ✓       | ✗       | ✓        | ✓      | ✓       | ✓       | ✓       | ✓       | ✓          |
| Dots free with opal diffuser @ max lighting flux | ✗    | ✗      | ✗       | ✗       | ✗       | ✗        | ✗      | ✗       | ✗       | ✗       | ✗       | ✗          |



DIMMABLE LIGHT



TEST REPORT



CE CERTIFIED

ANY CUTTING PROCESS MADE BY ANYONE OUTSIDE OF CANTALUPI SRL VOIDS THE PRODUCT'S WARRANTY  
INFORMATIONS PROVIDED WITH THIS DOCUMENT MAY BE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE

RELEASED ON 26.02.2021