

for Interiors

SNAKE SIDE MINI DYN WHITE




IP68 FLEXIBLE STRIP LED LIGHT LINE FULLY ENCAPSULATED IN POLYURETHANE COMPOUND. RESISTANT TO WATER, UV RADIATION, ABRASION AND CHEMICALS. VERY BRIGHT AND HOMOGENEOUS ILLUMINATION OVER THE ENTIRE LIGHT EMITTING SURFACE ALSO IN CURVE FORM. CLEAR CURVED OR LINEAR LINES AND LIGHT-EMITTING SURFACE ENABLES A FLUSH INSTALLATION IN CEILINGS, WALLS AND FURNITURE. THE SNAKE ARE PROVIDED WITH 40 CM OF CABLE WITHOUT CONNECTORS FROM BOTH SIDES; THE CABLE FEED ENABLES A SHADOW FREE ALIGNMENT.

TECHNICAL DATA

WATT/METER	2x8W/m	VOLTAGE	24VDC
LED/METER	224	IP	68
LUMEN/METER @2700K	---	CUT	62.5mm
CCT	2700K - 6500K	AMBIENT TEMP.	-25c ~ +65°C
CRI	>80		

DRAWINGS


STANDARD: 2 FRONT CABLE EXIT - 400MM CABLE ON BOTH SIDES

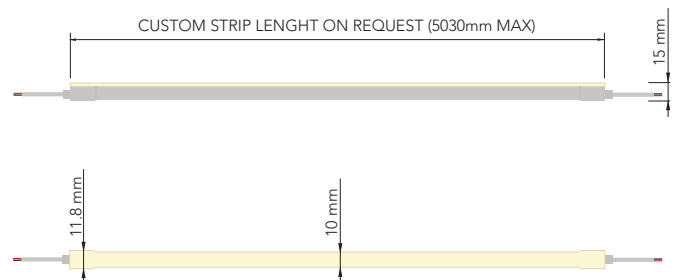

NOTE: THE CUSTOM LENGTHS YOU PROVIDE HAVE TO BE CHECKED AND CONFIRMED BY US IN ORDER TO PROVIDE THE PRODUCT WITHOUT ANY SHADOW AREAS ON THE ENDS


CUSTOM: (IT IS POSSIBLE TO REQUEST)

- A SINGLE CABLE EXIT *
- DIFFERENT TYPES OF CABLE EXIT




*WE SUGGEST TO USE 2 CABLE EXITS FOR LENGTHS GREATER THAN 2000mm

HOW TO BEND

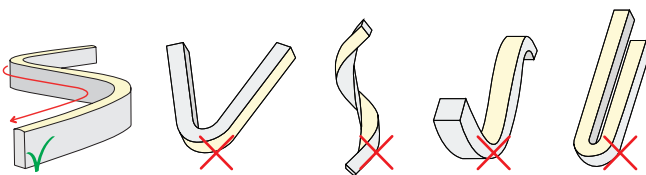

- ✓ CORRECT
- ✗ DO NOT BEND THIS WAY

MAX BENDING RADIUS

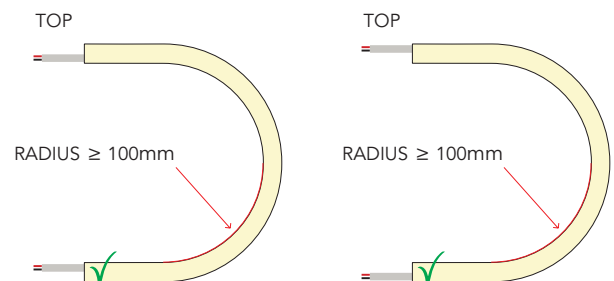

CODES

SNAKE SIDE MINI DYN WHITE

83 SNAKESIDEM CUSDYN

INDICATE THE DESIRED LENGTH (mm) IN THE REQUEST



DIMMABLE LIGHT



HIGH LIGHT OUTPUT



RESISTANT TO SOLVENTS



UV PROTECTED



TEST REPORT



FC CERTIFIED



ETL CERTIFIED




CE CERTIFIED

ALUMINUM MOUNTING PROFILE

PROFILE MATERIAL: ALUMINUM
 STANDARD LENGHT: 1 mt.

TECHNICAL DATA

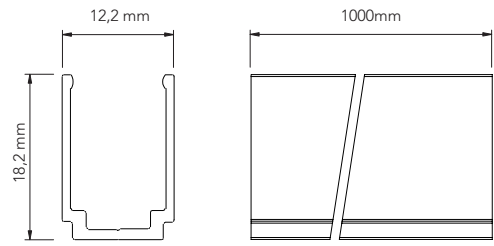


CODES



SNAKE SIDE MINI MOUNTING PROFILE (1000mm) **85 SNAKESIDEM 1000AAN**

MOUNTING SYSTEM

RADIUS	CUT	CUTTING BLADE SIZES
600mm	25mm	1.5mm
500mm	25mm	2.5mm
400mm	25mm	3.5mm
350mm	25mm	4.5mm

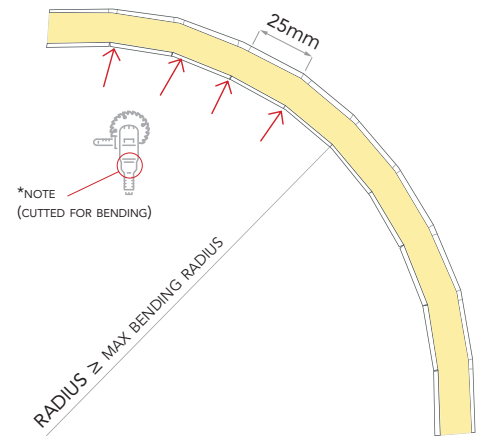

MOUNTING BRACKET

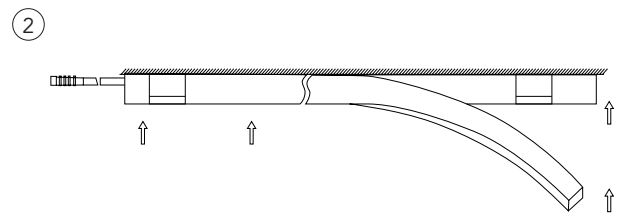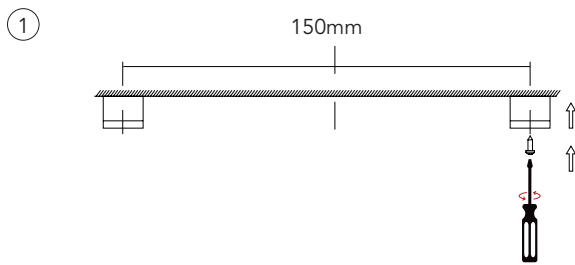

3 STAINLESS STEEL BRACKETS FOR EACH METER OF SNAKE ARE INCLUDED IN THE SHIPMENT, EXTRA BRACKET SET ON REQUEST

CODES

STAINLESS STEEL BRACKETS

85 SNAKESTAF SS SIDEM

WIRING DIAGRAM

