


for Interiors

PIXEL 280 LP WHITE




WHITE FLEXIBLE LOW-POWER HIGH-DENSITY LED STRIP WITH REFLECTIVE SURFACE AND 3M HIGH QUALITY ADHESIVE ON THE BACK. THE LED STRIP CAN BE USED IN ANY INDOOR ENVIRONMENT TO HIGHLIGHT ARCHITECTURAL DETAILS OR INTEGRATED INTO FURNITURES TO ADD VALUES TO ANY SPACE. THIS LED STRIP DOES NOT NEED A HEATSINK.

TECHNICAL DATA

WATT/METER	4.3	VOLTAGE	24VDC
LED/METER	280	SMD LED	2216
LUMEN/METER @3000K	530	IP	20
CCT	2700K/3000K/4000K	CUT	25mm
CRI	>90	WIDTH	8mm
LIFETIME	>36.000H	LED SELECTION	ONE BIN
AMBIENT TEMP.	-25°C ~ +40°C	MIN. BEND DIAMETER	60mm

DIMENSIONS

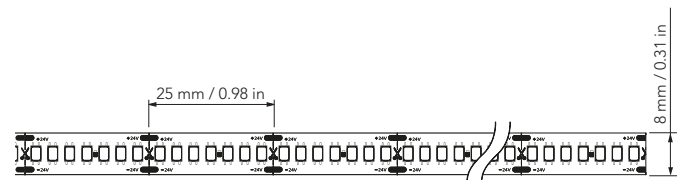

CODES

LED STRIP 2700K (5m)	83PIXEL 280 8 5 2700
LED STRIP 3000K (5m)	83PIXEL 280 8 5 3000
LED STRIP 4000K (5m)	83PIXEL 280 8 5 4000

REEL PACKAGING



THE LED STRIP WILL BE DELIVERED IN A 5m REEL PACKAGING.

SUGGESTED PROFILES

Code	PDSA	8545AL	85STE02	85STE06	85STE09	851UNICA	85MICA	85STE01	85STE03	85STE08	85STE10	851UNICAXL
Profiles												
Heat dissipation and/or LED strip width	✓	✓	✗	✓	✗	✓	✓	✓	✓	✓	✓	✓
Dots free with opal diffuser @ max lighting flux	✓	✓	✗	✓	✗	✓	✓	✓	✓	✓	✓	✓



ANY CUTTING PROCESS MADE BY ANYONE OUTSIDE OF CANTALUPI SRL VOIDS THE PRODUCT'S WARRANTY

INFORMATIONS PROVIDED WITH THIS DOCUMENT MAY BE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE

RELEASED ON 25.05.2021