PIXEL 280 MP WHITE



FLEXIBLE MID-POWER HIGH-DENSITY LED STRIP WITH AN HIGH DENSITY OF LEDS PER METER WITH WHITE REFLECTIVE SURFACE AND 3M HIGH QUALITY ADHESIVE ON THE BACK. THE LED STRIP CAN BE USED IN ANY INDOOR ENVIRONMENT TO HIGHLIGHT ARCHITECTURAL DETAILS OR INTEGRATED INTO FORNITURES TO ADD VALUES TO ANY SPACE. AN ALLUMINIUM PROFILE MUST BE USED TO ACT AS A HEATSINK.

TECHNICAL DATA

WATT/METER	8.7	VOLTAGE	24VDC
LED/METER	280	SMD LED	2216
LUMEN/METER @3000K	1060	IP	20
CCT	2700K/3000K/4000K	CUT	25mm
CRI	>90	WIDTH	8mm
LIFETIME	>36.000H	LED SELECTION	ONE BIN
AMBIENT TEMP.	-25°C ~ +40°C	MIN. BEND DIAMETER	60mm

DIMENSIONS

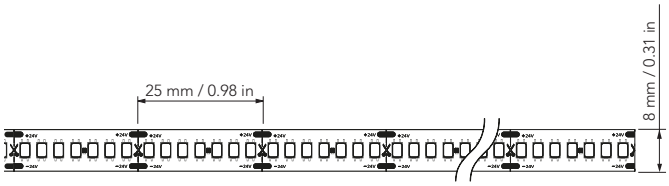

CODES

LED STRIP 2700K (5m)	**83PIXEL 280 8 9 2700**
LED STRIP 3000K (5m)	**83PIXEL 280 8 9 3000**
LED STRIP 4000K (5m)	**83PIXEL 280 8 9 4000**

REEL PACKAGING

THE LED STRIP WILL BE DELIVERED IN A 5m REEL PACKAGING.

SUGGESTED PROFILES

Code	*PDSA*	*8545AL*	*85STE02*	*85STE06*	*85STE09*	*851UNICA*	*85MICA*	*85STE01*	*85STE03*	*85STE08*	*85STE10*	*851UNICAXL*
Profiles												
Heat dissipation and/or LED strip width	✓	✓	×	✓	×	✓	✓	✓	✓	✓	✓	✓
Dots free with opal diffuser @ max lighting flux	✓	✓		✓		✓	✓	✓	✓	✓	✓	✓

DIM · RoHS · CE · ECO DESIGN APPROVED

ANY CUTTING PROCESS MADE BY ANYONE OUTSIDE OF CANTALUPI SRL VOIDS THE PRODUCT'S WARRANTY
INFORMATIONS PROVIDED WITH THIS DOCUMENT MAY BE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE

RELEASED ON 31.05.2021