

for Interiors

# PIXEL 60 RGBW




RGBW FLEXIBLE MID-POWER LED STRIP WITH WHITE REFLECTIVE SURFACE AND 3M HIGH QUALITY ADHESIVE ON THE BACK. THE LED STRIP CAN BE USED IN ANY INDOOR ENVIRONMENT TO HIGHLIGHT ARCHITECTURAL DETAILS OR INTEGRATED INTO FURNITURES TO ADD VALUES TO ANY SPACE WITH ANY COLOR OR WITH A PURE WHITE LIGHT. AN ALUMINUM PROFILE MUST BE USED TO ACT AS A HEATSINK. AN RGBW CONTROLLER IS NEEDED IN ORDER TO MANAGE THE COLORS/LIGHT VARIATIONS.

## TECHNICAL DATA

WATT/METER	16.8	VOLTAGE	24Vdc
LED/METER	60	SMD LED	5050
COLORS	● RED ● GREEN ● BLUE ● WHITE	IP	20
WHITE CCT	2700K, 3000K, 4000K	CUT	100mm
LUMEN/METER @3000K	344	WIDTH	12mm
LIFETIME	>36.000h	MIN. BEND DIAMETER	60mm
AMBIENT TEMP.	-25°C ~ +40°C		


## DIMENSIONS

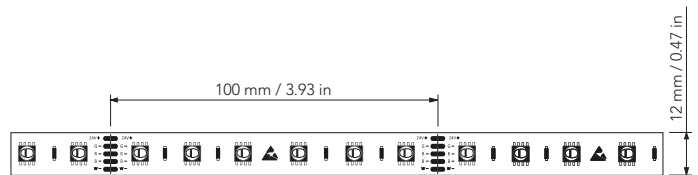

## CODES

LED STRIP RGBW 2700K (5m)	<b>83PIXEL 60 12 18 RGB 2700</b>
LED STRIP RGBW 3000K (5m)	<b>83PIXEL 60 12 18 RGB 3000</b>
LED STRIP RGBW 4000K (5m)	<b>83PIXEL 60 12 18 RGB 4000</b>

## REEL PACKAGING



THE LED STRIP WILL BE DELIVERED IN A 5m REEL PACKAGING.

## SUGGESTED PROFILES

Code	PDSA	8545AL	85STE02	85STE06	85STE09	851UNICA	85MICA	85STE01	85STE03	85STE08	85STE10	851UNICAXL
Profiles												
Heat dissipation and/or LED strip width	×	×	×	✓	×	×	×	✓	×	✓	✓	✓



ANY CUTTING PROCESS MADE BY ANYONE OUTSIDE OF CANTALUPI SRL VOIDS THE PRODUCT'S WARRANTY

INFORMATIONS PROVIDED WITH THIS DOCUMENT MAY BE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE

RELEASED ON 25.05.2021