for Interiors



SNAKE TOP RGBW



IP68 FLEXIBLE STRIP LED LIGHT LINE FULLY ENCAPSULATED IN POLYURETHANE COMPOUND.RESISTANT TO WATER, UV RADIATION, ABRASION AND CHEMICALS. VERY BRIGHT AND HOMOGENEOUS ILLUMINATION OVER THE ENTIRE LIGHT EMITTING SURFACE ALSO IN CURVE FORM. CLEAR CURVED OR LINEAR LINES AND LIGHT-EMITTING SURFACE ENABLES A FLUSH INSTALLATION IN CEILINGS, WALLS AND FURNITURE. THE SNAKE ARE PROVIDED WITH 40 CM OF CABLE WITHOUT CONNECTORS FROM BOTH SIDES; THE CABLE FEED ENABLES A SHADOW FREE ALIGNMENT.


TECHNICAL DATA

WATT/METER	13	VOLTAGE	24vdc
LED/METER	70	IP	68
W сст	2700K, 3000K	CUT	100mm
R	620 - 625nm	AMBIENT TEMP.	-25°c ~ +65°c
G	520 - 525nm		
В	460 - 465nm		

CUSTOM: (IT IS POSSIBLE TO REQUEST)


- A SINGLE CABLE EXIT *
- DIFFERENT TYPES OF CABLE EXIT

*WE SUGGEST TO USE 2 CABLE EXITS FOR LENGHTS GREATER THAN 2000mm




DRAWINGS

STANDARD: 2 SIDE CABLE EXIT - 400mm CABLE ON BOTH SIDES

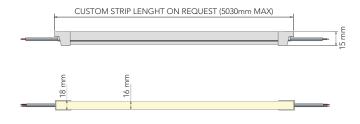


NOTE: THE CUSTOM LENGHTS YOU PROVIDE HAVE TO BE CHECKED AND CONFIRMED BY US IN ORDER TO PROVIDE THE PRODUCT WITHOUT ANY SHADOW AREAS ON THE ENDS

HOW TO BEND

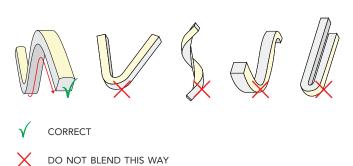

MAX BENDING RADIUS



CODES

SNAKE TOP RGBW

INDICATE THE DESIRED LENGHT (mm) IN THE REQUEST

83 SNAKETOPCUS + CCT ¹

¹CCT CODES : **2700** (2700K) / **3000** (3000K) / **4000** (4000K)

















ALUMINUM MOUNTING PROFILE

PROFILE MATERIAL:

STANDARD LENGHT: CUSTOM LENGHT ON REQUEST



ANODIZED ALUMINUM

19 mm 1000mm 16,6 mm


CODES

TECHNICAL DATA

SNAKE TOP MOUNTING PROFILE (1000mm)

85 SNAKETOP 1000AAN

MOUNTING SYSTEM: FLEXIBLE PROFILE FOR BENDING PARTS

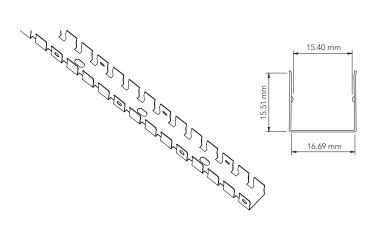





CODES

SNAKE TOP BENDING MOUNTING PROFILE (970mm) 85 SNAKETOP CUR970SS

MOUNTING BRACKET

WIRING DIAGRAM





CODES

STAINLESS STEEL BRACKETS

85 SNAKESTAF SS TOP

