for Interiors



SNAKE TOP WHITE




IP68 FLEXIBLE STRIP LED LIGHT LINE FULLY ENCAPSULATED IN POLYURETHANE COMPOUND.RESISTANT TO WATER, UV RADIATION, ABRASION AND CHEMICALS. VERY BRIGHT AND HOMOGENEOUS ILLUMINATION OVER THE ENTIRE LIGHT EMITTING SURFACE ALSO IN CURVE FORM. CLEAR CURVED OR LINEAR LINES AND LIGHT-EMITTING SURFACE ENABLES A FLUSH INSTALLATION IN CEILINGS, WALLS AND FURNITURE. THE SNAKE ARE PROVIDED WITH 40 CM OF CABLE WITHOUT CONNECTORS FROM BOTH SIDES; THE CABLE FEED ENABLES A SHADOW FREE ALIGNMENT.

TECHNICAL DATA

| WATT/METER | | 10 | VOLTAGE | 24vdc |
|--------------------|-------------------------|-----|---------------|--------------|
| LED/METER | | 140 | IP | 68 |
| LUMEN/METER @3000K | | 820 | CUT | 50mm |
| CCT | 2700K/3000K/4000K/6000K | | AMBIENT TEMP. | -25c ~ +65°c |
| CRI | | >80 | | |

DRAWINGS

STANDARD: 2 SIDE CABLE EXIT - 400mm CABLE ON BOTH SIDES

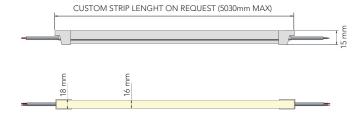


CUSTOM: (IT IS POSSIBLE TO REQUEST)

- A SINGLE CABLE EXIT *

HOW TO BEND


- DIFFERENT TYPES OF CABLE EXIT


*WE SUGGEST TO USE 2 CABLE EXITS FOR LENGHTS GREATER THAN 2000mm



NOTE: THE CUSTOM LENGHTS YOU PROVIDE HAVE TO BE CHECKED AND CONFIRMED BY US IN ORDER TO PROVIDE THE PRODUCT WITHOUT ANY SHADOW AREAS ON THE ENDS

MAX BENDING RADIUS

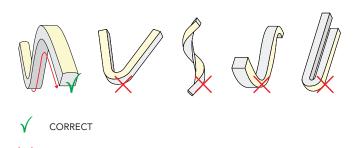



CODES

SNAKE TOP WHITE

INDICATE THE DESIRED LENGHT (mm) IN THE REQUEST

DO NOT BLEND THIS WAY

83 SNAKETOPBCUS + CCT 1

¹CCT CODES : **2700** (2700K) / **3000** (3000K) / **4000** (4000K)


















ALUMINUM MOUNTING PROFILE

TECHNICAL DATA

PROFILE MATERIAL: ANODIZED ALUMINUM

STANDARD LENGHT: CUSTOM LENGHT ON REQUEST






CODES

SNAKE TOP MOUNTING PROFILE (1000mm)

85 SNAKETOP 1000AAN

MOUNTING SYSTEM: FLEXIBLE PROFILE FOR BENDING PARTS

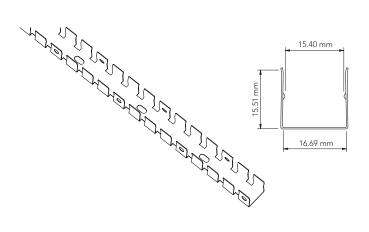





CODES

SNAKE TOP BENDING MOUNTING PROFILE (970mm) 85 SNAKETOP CUR970SS

MOUNTING BRACKET

WIRING DIAGRAM





CODES

STAINLESS STEEL BRACKETS

85 SNAKESTAF SS TOP

