

for Interiors

# SNAKE SIDE MINI DYN WHITE




IP68 FLEXIBLE STRIP LED LIGHT LINE FULLY ENCAPSULATED IN POLYURETHANE COMPOUND. RESISTANT TO WATER, UV RADIATION, ABRASION AND CHEMICALS. VERY BRIGHT AND HOMOGENEOUS ILLUMINATION OVER THE ENTIRE LIGHT EMITTING SURFACE ALSO IN CURVE FORM. CLEAR CURVED OR LINEAR LINES AND LIGHT-EMITTING SURFACE ENABLES A FLUSH INSTALLATION IN CEILINGS, WALLS AND FURNITURE. THE SNAKE ARE PROVIDED WITH 40 CM OF CABLE WITHOUT CONNECTORS FROM BOTH SIDES; THE CABLE FEED ENABLES A SHADOW FREE ALIGNMENT.

## TECHNICAL DATA

WATT/METER	2x8W/m	VOLTAGE	24VDC
LED/METER	224	IP	68
LUMEN/METER @2700K	---	CUT	62.5mm
CCT	2700K - 6500K	AMBIENT TEMP.	-25c ~ +65°C
CRI	>80		

## DRAWINGS


**STANDARD:** 2 FRONT CABLE EXIT - 400MM CABLE ON BOTH SIDES

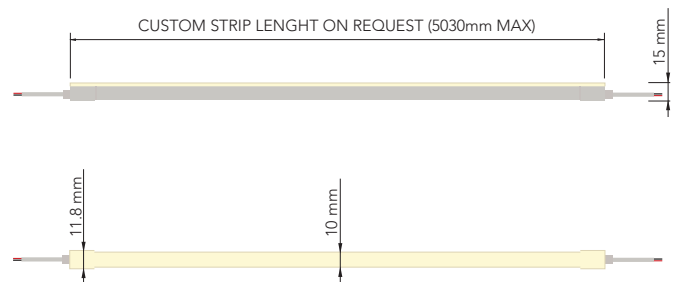

NOTE: THE CUSTOM LENGTHS YOU PROVIDE HAVE TO BE CHECKED AND CONFIRMED BY US IN ORDER TO PROVIDE THE PRODUCT WITHOUT ANY SHADOW AREAS ON THE ENDS


## CUSTOM: (IT IS POSSIBLE TO REQUEST)

- A SINGLE CABLE EXIT \*
- DIFFERENT TYPES OF CABLE EXIT

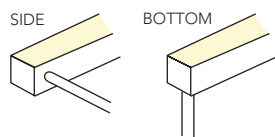


\*WE SUGGEST TO USE 2 CABLE EXITS FOR LENGTHS GREATER THAN 2000mm

## HOW TO BEND

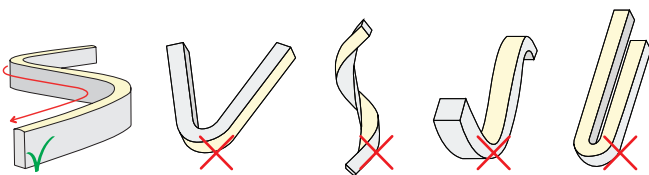

- ✓ CORRECT
- ✗ DO NOT BEND THIS WAY

## MAX BENDING RADIUS

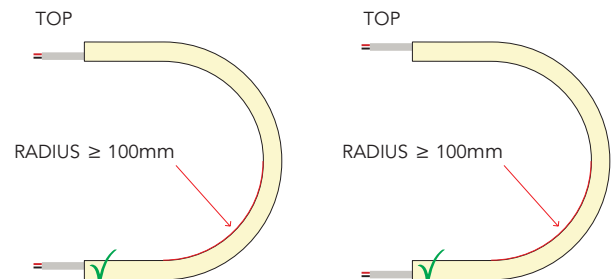

## CODES

SNAKE SIDE MINI DYN WHITE

83 SNAKESIDEM CUSDYN

INDICATE THE DESIRED LENGTH (mm) IN THE REQUEST



DIMMABLE LIGHT



HIGH LIGHT OUTPUT



RESISTANT TO SOLVENTS



UV PROTECTED



TEST REPORT



FC CERTIFIED



ETL CERTIFIED



CE CERTIFIED


## ALUMINUM MOUNTING PROFILE

PROFILE MATERIAL: ALUMINUM  
STANDARD LENGHT: 1 mt.



### CODES

SNAKE SIDE MINI MOUNTING PROFILE (1000mm) **85 SNAKESIDEM 1000AAN**

## TECHNICAL DATA

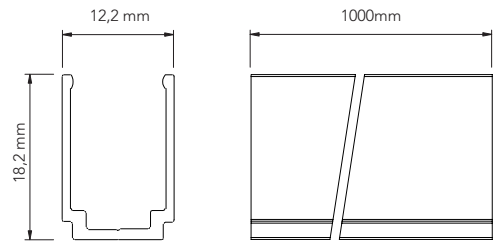



## STAINLESS STEEL (SUS201) FLEXIBLE MOUNTING PROFILE

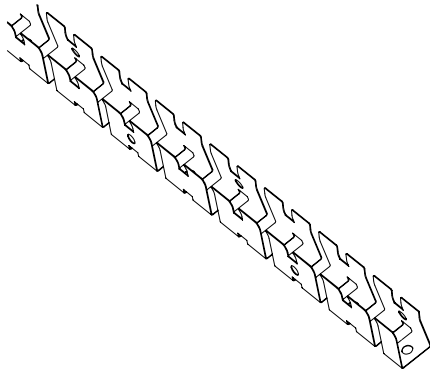

### CODES

SNAKE SIDE MINI BENDING MOUNTING PROFILE (970mm) **85 SNAKESIDEM CUR970SS**

## MOUNTING BRACKET

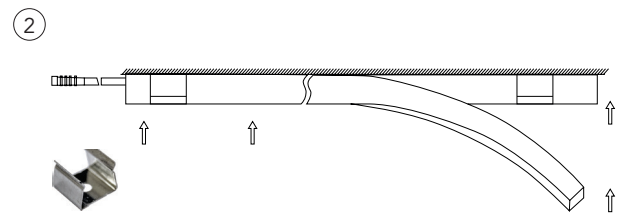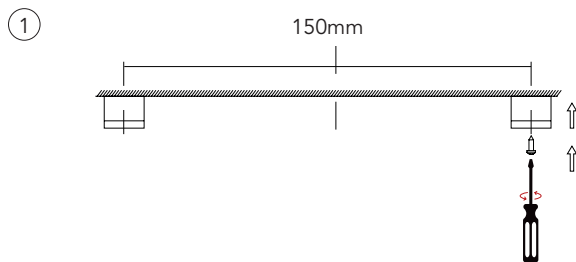

### CODES

STAINLESS STEEL BRACKETS

**85 SNAKESTAF SS SIDEM**

## WIRING DIAGRAM

