

for Interiors

SNAKE SIDE RGB




TECHNICAL DATA

WATT/METER	12	VOLTAGE	24vdc
LED/METER	70	IP	68
R	620 - 625nm	CUT	62.5mm
G	520 - 525nm	AMBIENT TEMP.	-25°C ~ +65°C
B	460 - 465nm		


CUSTOM: (IT IS POSSIBLE TO REQUEST)

- A SINGLE CABLE EXIT *
- DIFFERENT TYPES OF CABLE EXIT

*WE SUGGEST TO USE 2 CABLE EXITS FOR LENGTHS GREATER THAN 2000mm



HOW TO BEND

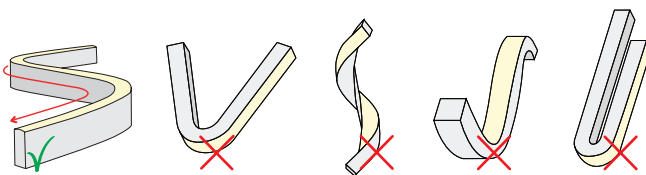

- ✓ CORRECT
- ✗ DO NOT BEND THIS WAY

CODES

SNAKE SIDE RGB


83 SNAKESIDECUS RGB

INDICATE THE DESIRED LENGTH (mm) IN THE REQUEST

IP68 FLEXIBLE STRIP LED LIGHT LINE FULLY ENCAPSULATED IN POLYURETHANE COMPOUND. RESISTANT TO WATER, UV RADIATION, ABRASION AND CHEMICALS. VERY BRIGHT AND HOMOGENEOUS ILLUMINATION OVER THE ENTIRE LIGHT EMITTING SURFACE ALSO IN CURVE FORM. CLEAR CURVED OR LINEAR LINES AND LIGHT-EMITTING SURFACE ENABLES A FLUSH INSTALLATION IN CEILINGS, WALLS AND FURNITURE. THE SNAKE ARE PROVIDED WITH 40 CM OF CABLE WITHOUT CONNECTORS FROM BOTH SIDES; THE CABLE FEED ENABLES A SHADOW FREE ALIGNMENT.


DRAWINGS

STANDARD: 2 SIDE CABLE EXIT - 400MM CABLE ON BOTH SIDES

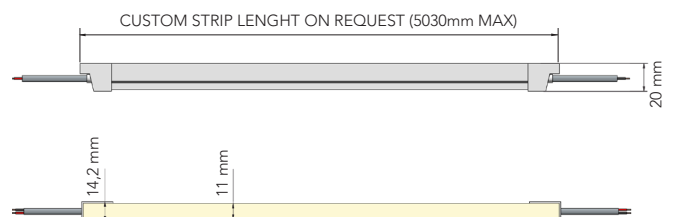

NOTE: THE CUSTOM LENGTHS YOU PROVIDE HAVE TO BE CHECKED AND CONFIRMED BY US IN ORDER TO PROVIDE THE PRODUCT WITHOUT ANY SHADOW AREAS ON THE ENDS

MAX BENDING RADIUS

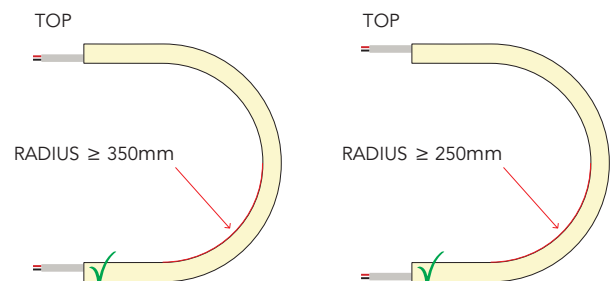

DIMMABLE LIGHT



HIGH LIGHT OUTPUT



RESISTANT TO SOLVENTS



UV PROTECTED



TEST REPORT



FC CERTIFIED




ETL CERTIFIED




CE CERTIFIED

ALUMINUM MOUNTING PROFILE

PROFILE MATERIAL: ANODIZED ALUMINUM
 STANDARD LENGTH: CUSTOM LENGTH ON REQUEST

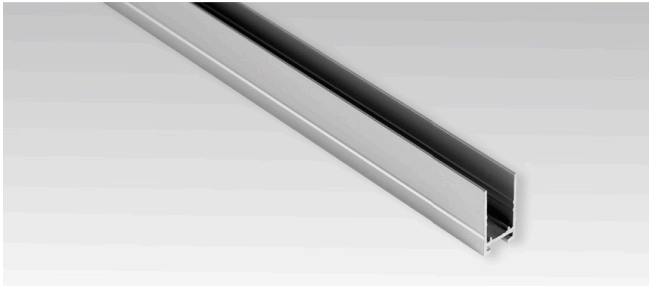

TECHNICAL DATA


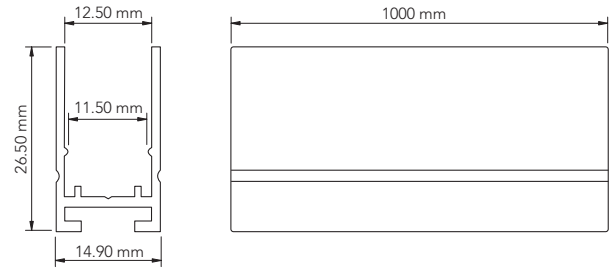


CODES

SNAKE SIDE MOUNTING PROFILE (1000mm)

85 SNAKESIDE 1000AAN



MOUNTING SYSTEM: FLEXIBLE PROFILE FOR BENDING PARTS

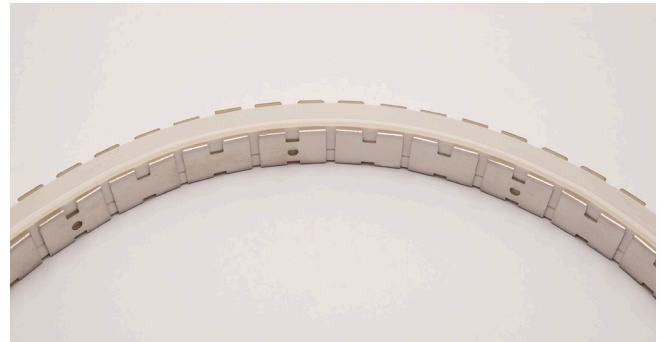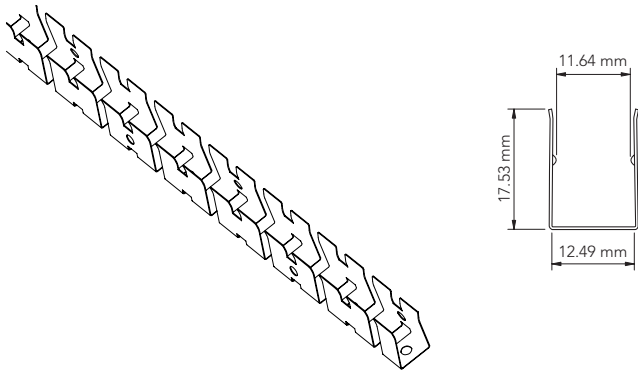

CODES

SNAKE SIDE BENDING MOUNTING PROFILE (970mm) **85 SNAKESIDE CUR970SS**

MOUNTING BRACKET

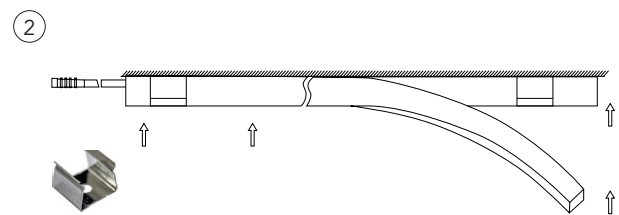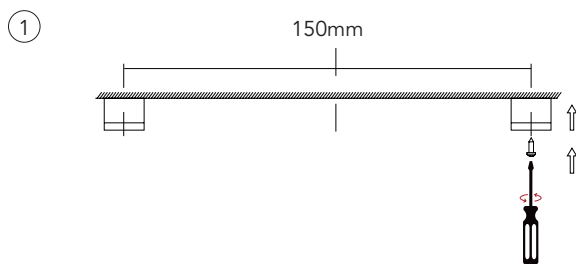

CODES

STAINLESS STEEL BRACKETS

85 SNAKESTAF SS SIDE

WIRING DIAGRAM

