

# SNAKE TOP MINI WHITE



IP68 FLEXIBLE STRIP LED LIGHT LINE FULLY ENCAPSULATED IN POLYURETHANE COMPOUND. RESISTANT TO WATER, UV RADIATION, ABRASION AND CHEMICALS. VERY BRIGHT AND HOMOGENEOUS ILLUMINATION OVER THE ENTIRE LIGHT EMITTING SURFACE ALSO IN CURVE FORM. CLEAR CURVED OR LINEAR LINES AND LIGHT-EMITTING SURFACE ENABLES A FLUSH INSTALLATION IN CEILINGS, WALLS AND FURNITURE. THE SNAKE ARE PROVIDED WITH 40 CM OF CABLE WITHOUT CONNECTORS FROM BOTH SIDES; THE CABLE FEED ENABLES A SHADOW FREE ALIGNMENT.


## TECHNICAL DATA

WATT/METER	10	VOLTAGE	24VDC
LED/METER	140	IP	68
LUMEN/METER @3000K	490	CUT	50mm
CCT	2700K/3000K/4000K/6000K	AMBIENT TEMP.	-25°C ~ +65°C
CRI	>80		

### CUSTOM: (IT IS POSSIBLE TO REQUEST)


- A SINGLE CABLE EXIT \*
- DIFFERENT TYPES OF CABLE EXIT

\*WE SUGGEST TO USE 2 CABLE EXITS FOR LENGTHS GREATER THAN 2000mm




## DRAWINGS

**STANDARD:** 2 FRONT CABLE EXIT - 400mm CABLE ON BOTH SIDES

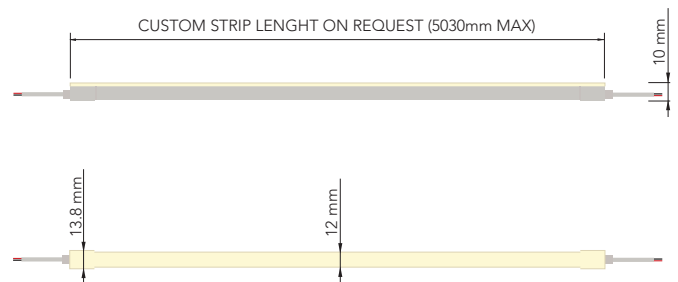


NOTE: THE CUSTOM LENGTHS YOU PROVIDE HAVE TO BE CHECKED AND CONFIRMED BY US IN ORDER TO PROVIDE THE PRODUCT WITHOUT ANY SHADOW AREAS ON THE ENDS

## HOW TO BEND

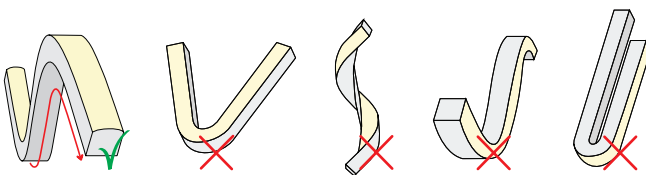

- ✓ CORRECT
- ✗ DO NOT BEND THIS WAY

## MAX BENDING RADIUS

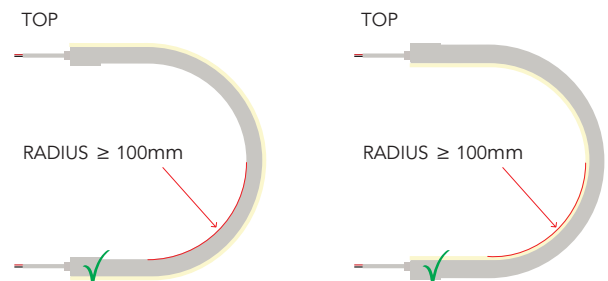

## CODES

### SNAKE TOP MINI WHITE

INDICATE THE DESIRED LENGTH (mm) IN THE REQUEST

### 83 SNAKETOPMV2CUS + CCT <sup>1</sup>

<sup>1</sup>CCT CODES : 2700 (2700K) / 3000 (3000K) / 4000 (4000K)



DIMMABLE LIGHT



HIGH LIGHT OUTPUT



RESISTANT TO SOLVENTS



UV PROTECTED



TEST REPORT



FC CERTIFIED



ETL CERTIFIED



CE CERTIFIED


## ALUMINUM MOUNTING PROFILE

PROFILE MATERIAL: ALUMINUM  
STANDARD LENGTH: 1 mt.



### CODES

SNAKE TOP MINI MOUNTING PROFILE (1000mm) **85 SNAKETOPMV2 1000AAN**

## TECHNICAL DATA

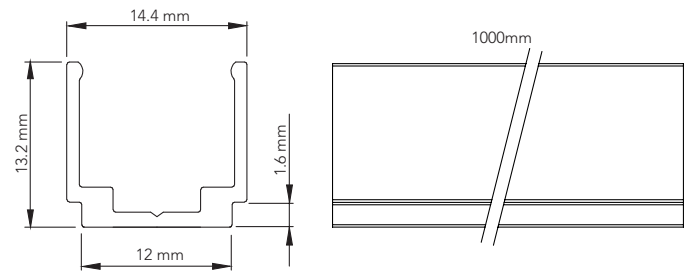



## STAINLESS STEEL (SUS201) FLEXIBLE MOUNTING PROFILE

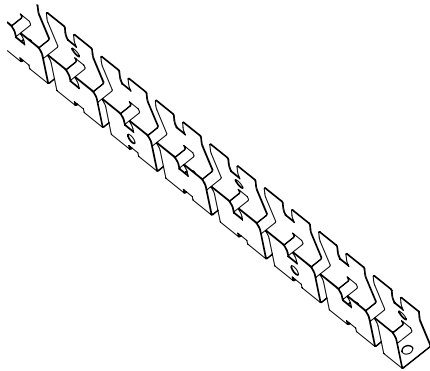

### CODES

SNAKE TOP MINI BENDING MOUNTING PROFILE (970mm) **85 SNAKETOPMV2 CUR970SS**

## MOUNTING BRACKET

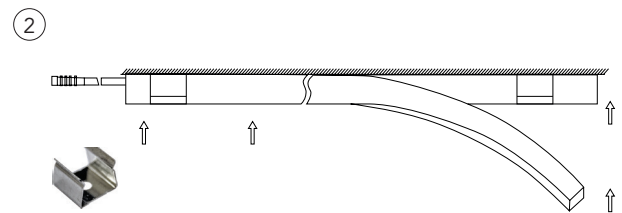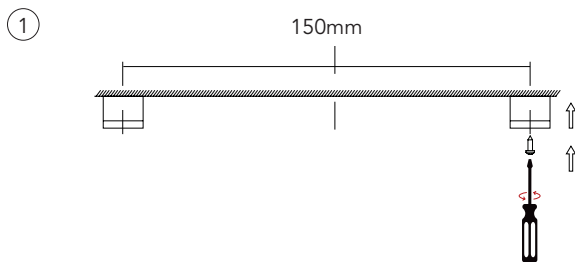

### CODES

STAINLESS STEEL BRACKETS

**85 SNAKESTAF SS TOPMV2**

## WIRING DIAGRAM

