SNAKE TOP MINI RGB

IP68 FLEXIBLE STRIP LED LIGHT LINE FULLY ENCAPSULATED IN POLYURETHANE COMPOUND.RESISTANT TO WATER, UV RADIATION, ABRASION AND CHEMICALS. VERY BRIGHT AND HOMOGENEOUS ILLUMINATION OVER THE ENTIRE LIGHT EMITTING SURFACE ALSO IN CURVE FORM. CLEAR CURVED OR LINEAR LINES AND LIGHT-EMITTING SURFACE ENABLES A FLUSH INSTALLATION IN CEILINGS, WALLS AND FURNITURE. THE SNAKE ARE PROVIDED WITH 40 CM OF CABLE WITHOUT CONNECTORS FROM BOTH SIDES; THE CABLE FEED ENABLES A SHADOW FREE ALIGNMENT.

TECHNICAL DATA

WATT/METER	10	VOLTAGE	24VDC
LED/METER	98	IP	68
R	620 - 625nm	CUT	50mm
G	520 - 525nm	AMBIENT TEMP.	-25°C ~ +65°C
B	460 - 465nm		

CUSTOM: (IT IS POSSIBLE TO REQUEST)

- A SINGLE CABLE EXIT *
- DIFFERENT TYPES OF CABLE EXIT

*WE SUGGEST TO USE 2 CABLE EXITS FOR LENGHTS GREATER THAN 2000mm



DRAWINGS

STANDARD: 2 FRONT CABLE EXIT - 400mm CABLE ON BOTH SIDES

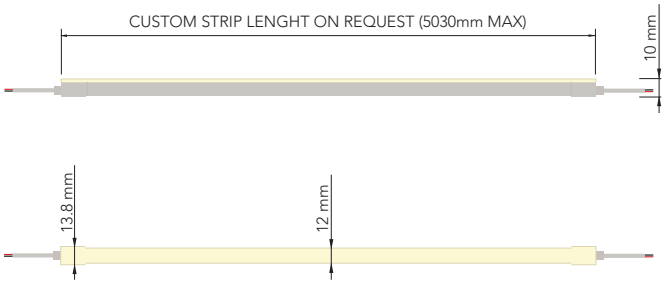

NOTE: THE CUSTOM LENGHTS YOU PROVIDE HAVE TO BE CHECKED AND CONFIRMED BY US IN ORDER TO PROVIDE THE PRODUCT WITHOUT ANY SHADOW AREAS ON THE ENDS

HOW TO BEND

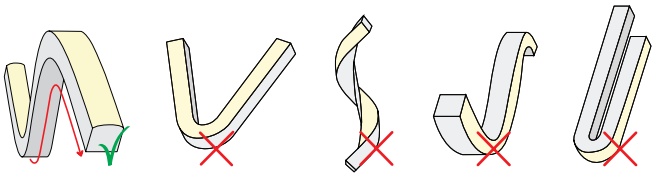

✓ CORRECT

✗ DO NOT BLEND THIS WAY

MAX BENDING RADIUS

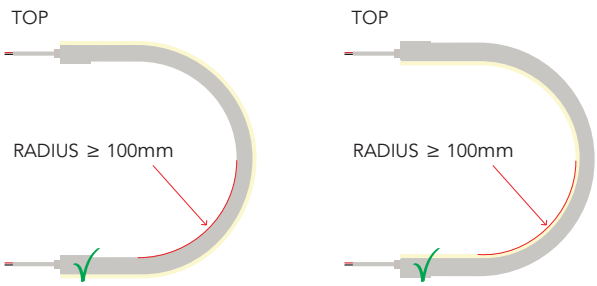

CODES

SNAKE TOP MINI RGB	**83 SNAKETOPMV2 CUSRGB**

INDICATE THE DESIRED LENGHT (mm) IN THE REQUEST

DIMMABLE LIGHT · HIGH LIGHT OUTPUT · RESISTANT TO SOLVENTS · UV PROTECTED · TEST REPORT · FC CERTIFIED · ETL CERTIFIED · CE CERTIFIED

ALUMINUM MOUNTING PROFILE

PROFILE MATERIAL: ALUMINUM
STANDARD LENGHT: 1 mt.

TECHNICAL DATA

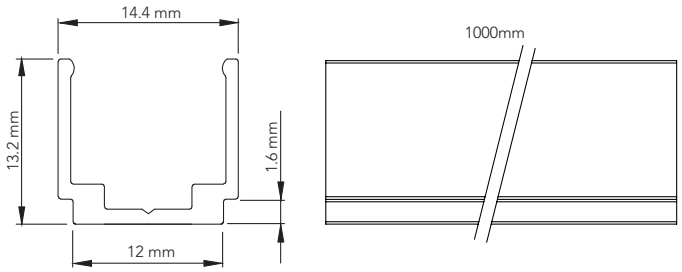

CODES

SNAKE TOP MINI MOUNTING PROFILE (1000mm) **85 SNAKETOPMV2 1000AAN**

STAINLESS STEEL (SUS201) FLEXIBLE MOUNTING PROFILE

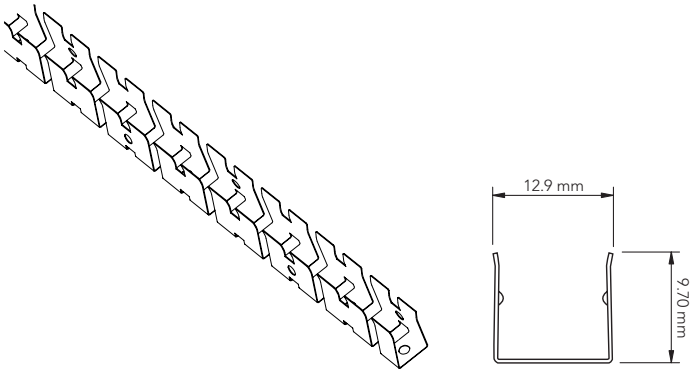

CODES

SNAKE TOP MINI BENDING MOUNTING PROFILE (970mm) **85 SNAKETOPMV2 CUR970SS**

MOUNTING BRACKET

① 150mm

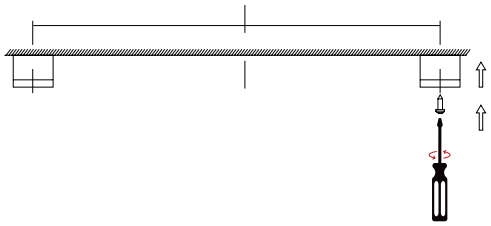

②

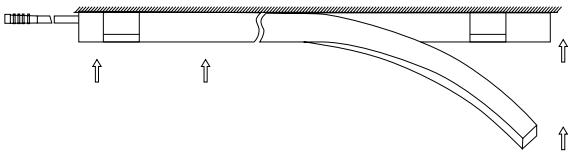

3 STAINLESS STEEL BRACKETS FOR EACH METER OF SNAKE ARE INCLUDED IN THE SHIPMENT, EXTRA BRACKET SET ON REQUEST

CODES

STAINLESS STEEL BRACKETS **85 SNAKESTAF SS TOPMV2**

WIRING DIAGRAM

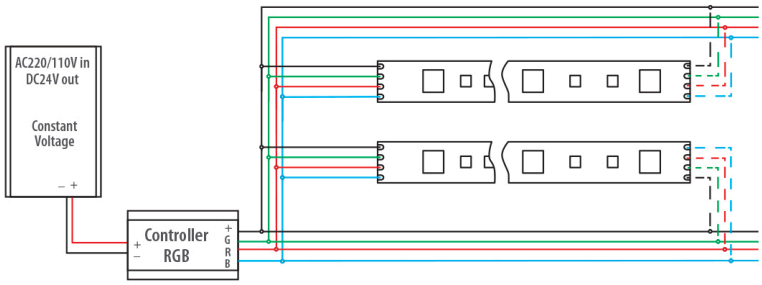

INFORMATION PROVIDED WITH THIS DOCUMENT MAY BE SUBJECT TO CHANGES AT ANY TIME.
RELEASED ON 21.12.2022