


for Interiors

# SNAKE SIDE RGBW

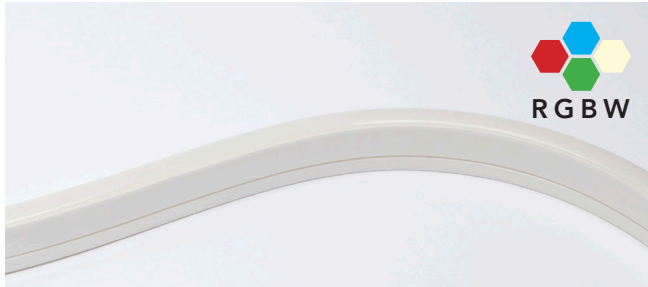


## TECHNICAL DATA

WATT/METER	13	VOLTAGE	24vdc
LED/METER	70	IP	68
W CCT	2700K, 3000K	CUT	100mm
R	620 - 625nm	AMBIENT TEMP.	-25°C ~ +65°C
G	520 - 525nm		
B	460 - 465nm		


### CUSTOM: (IT IS POSSIBLE TO REQUEST)

- A SINGLE CABLE EXIT \*
- DIFFERENT TYPES OF CABLE EXIT

\*WE SUGGEST TO USE 2 CABLE EXITS FOR LENGTHS GREATER THAN 2000mm



## HOW TO BEND

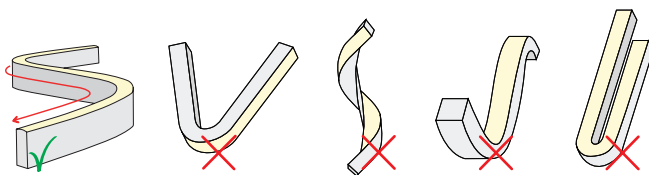

- ✓ CORRECT
- ✗ DO NOT BEND THIS WAY

## CODES


SNAKE SIDE RGBW

INDICATE THE DESIRED LENGTH (mm) IN THE REQUEST

IP68 FLEXIBLE STRIP LED LIGHT LINE FULLY ENCAPSULATED IN POLYURETHANE COMPOUND. RESISTANT TO WATER, UV RADIATION, ABRASION AND CHEMICALS. VERY BRIGHT AND HOMOGENEOUS ILLUMINATION OVER THE ENTIRE LIGHT EMITTING SURFACE ALSO IN CURVE FORM. CLEAR CURVED OR LINEAR LINES AND LIGHT-EMITTING SURFACE ENABLES A FLUSH INSTALLATION IN CEILINGS, WALLS AND FURNITURE. THE SNAKE ARE PROVIDED WITH 40 CM OF CABLE WITHOUT CONNECTORS FROM BOTH SIDES; THE CABLE FEED ENABLES A SHADOW FREE ALIGNMENT.


## DRAWINGS

**STANDARD:** 2 SIDE CABLE EXIT - 400MM CABLE ON BOTH SIDES

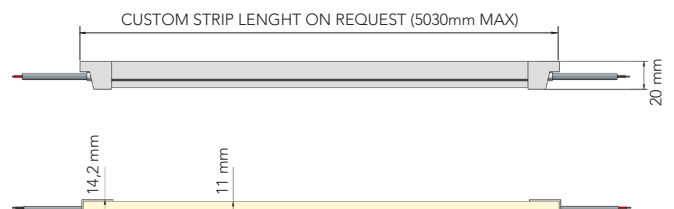

NOTE: THE CUSTOM LENGTHS YOU PROVIDE HAVE TO BE CHECKED AND CONFIRMED BY US IN ORDER TO PROVIDE THE PRODUCT WITHOUT ANY SHADOW AREAS ON THE ENDS

## MAX BENDING RADIUS

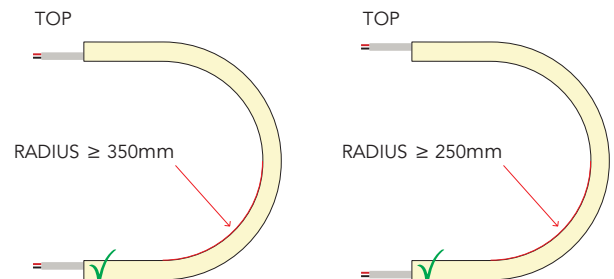

DIMMABLE LIGHT



HIGH LIGHT OUTPUT



RESISTANT TO SOLVENTS



UV PROTECTED



TEST REPORT



FC CERTIFIED



ETL CERTIFIED




CE CERTIFIED

**83 SNAKESIDECUS + CCT <sup>1</sup>**


<sup>1</sup>CCT CODES : 2700 (2700K) / 3000 (3000K) / 4000 (4000K)

**ALUMINUM MOUNTING PROFILE**

PROFILE MATERIAL: ANODIZED ALUMINUM  
 STANDARD LENGHT: CUSTOM LENGHT ON REQUEST

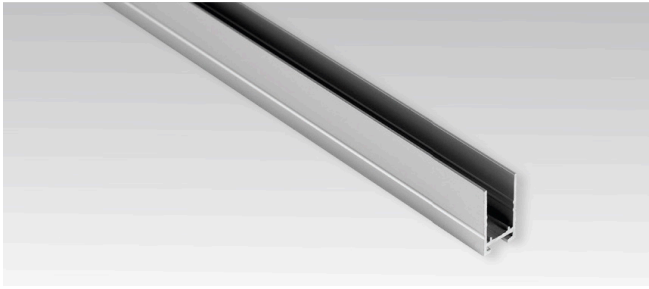



**TECHNICAL DATA**

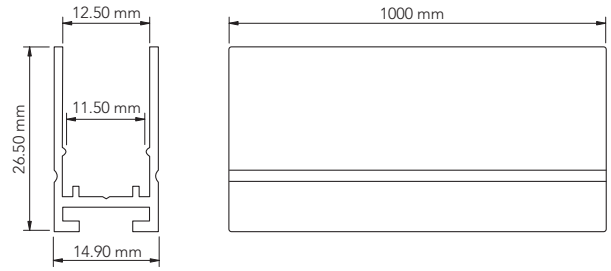

**CODES**

SNAKE SIDE MOUNTING PROFILE (1000mm) **85 SNAKESIDE 1000AAN**



**MOUNTING SYSTEM: FLEXIBLE PROFILE FOR BENDING PARTS**

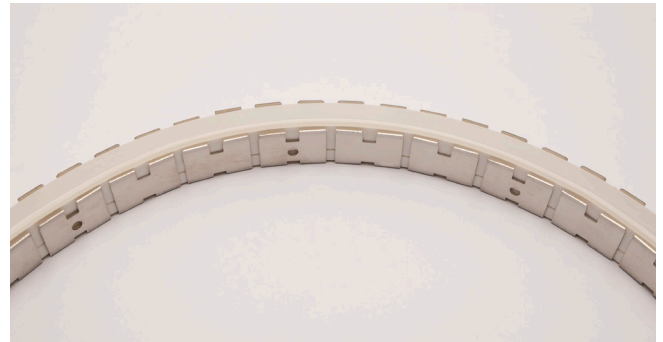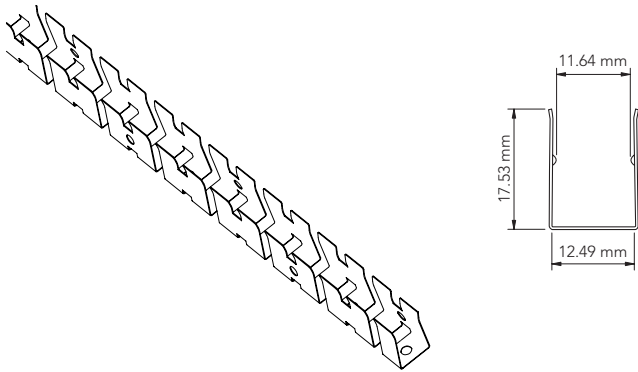

**CODES**

SNAKE SIDE BENDING MOUNTING PROFILE (970mm) **85 SNAKESIDE CUR970SS**

**MOUNTING BRACKET**

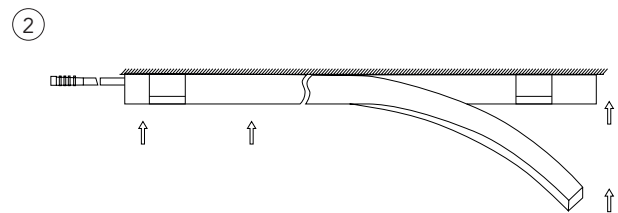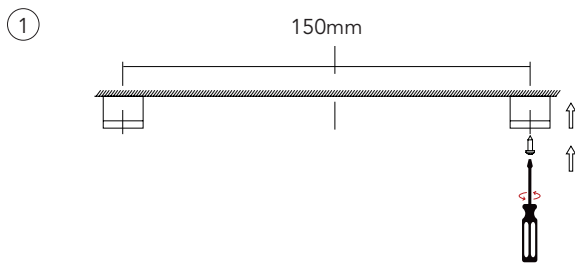

3 STAINLESS STEEL BRACKETS FOR EACH METER OF SNAKE ARE INCLUDED IN THE SHIPMENT, EXTRA BRACKET SET ON REQUEST

**CODES**

STAINLESS STEEL BRACKETS **85 SNAKESTAF SS SIDE**

**WIRING DIAGRAM**

